

ASAHI

BALL VALVE

P.043 BALL VALVE TYPE 21, 21 α

P.053 WATER BALL VALVE

P.057 3 WAY BALL VALVE TYPE 23

P.063 3 WAY BALL VALVE TYPE 23 H

P.065 LAB COCK

P.067 COMPACT BALL VALVE TYPE 27



BALL VALVE LINEUP

APPLICATION	TYPE	SIZE	MATERIAL			
			U-PVC	C-PVC	PP	PVDF
FOR CHEMICALS	21 α	15 — 50mm	●	●		
	21	15 — 50mm			●	●
		65 — 100mm	●	●	●	●
FOR WATER	WATER BALL VALVE	15 — 50mm	●			
3 WAY BALL	23	15 — 100mm	●	●	●	●
	23H	25 — 40mm			●	
LAB COCK	—	1/4 — 3/8inch	●			
COMPACT SIZE	27	13 — 50mm	●	●		

AVAILABLE OPTIONS AUTOMATIC * Options other than those listed below are also available. Contact us for inquiry.

	PNEUMATIC			ELECTRIC	
	TYPE TA	TYPE AA	TYPE VC	TYPE T	TYPE V
SOLENOID VALVE (NAMUR)	●	●			
SOLENOID VALVE (WITH EXHAUST THROTTLE VALVE WITH SILENCER)			● ^{*1}		
FILTER REGULATOR	●	●			
SPEED CONTROLLER	●	●	●	● ^{*3}	
BYPASS VALVE (WITH SPEED CONTROLLER)	●	●			
LIMIT SWITCH BOX	●	●	●		
LIMIT SWITCH	●	●			
OUTPUT CONTACT LIMIT SWITCH				STANDARD	
INTERMEDIATE OUTPUT CONTACT LIMIT SWITCH				● ^{*3}	
PROXIMITY SWITCH	●				
E/P POSITIONER	●				
P/P POSITIONER	●				
E/E POSITIONER				● ^{*3}	
MANUAL OPERATION LEVER	●				
MANUAL OVERRIDE	●			●	
FULL OPENING ADJUSTMENT	●				
SPECIAL PAINTING (ACTUATOR ONLY)	●			●	
SPECIAL FITTING (STAINLESS STEEL)	●	●		●	
METAL INSERT PROVIDED (WITH ENSAT)	●	●		●	
SPACE HEATER				● ^{*2}	STANDARD
POTENTIOMETER				● ^{*3}	

*1 Not compatible with the NAMUR standard. *2 Provided as standard for 65 mm or more.

*3 When it is mounted on a valve with a size of 50 mm or less, the actuator specifications will change.



SOLENOID VALVE



SPEED CONTROLLER



LIMIT SWITCH BOX



LIMIT SWITCH



POSITIONER

BALL VALVE TYPE 21, 21α

- EQUIPPED WITH TOP FLANGE, ALLOWING FOR EASY CHANGE TO AUTOMATIC VALVE.
- COMES WITH BOTTOM STAND TO FACILITATE MOUNTING ON RACKS AND PANELS (See the Ensaf mounting procedure on page 69).
- DOUBLE O-RING ON THE STEM IMPROVES DURABILITY AND SEALING PROPERTY.

MANUAL



AUTOMATIC



BASIC SPECIFICATIONS

VALVE TYPE	BALL VALVE TYPE 21, 21α			
SIZE	15 mm—100 mm (1/2 inch—4 inch)			
BODY MATERIAL	U-PVC	C-PVC	PP	PVDF
SEAL MATERIAL / O-RING	EPDM	FKM	etc.	
CONNECTION / FLANGED	JIS5K, JIS10K, DIN PN10, ANSI CLASS150			
SOCKET	JIS, DIN, ANSI			
THREADED	Rc. Rp. NPT			

HIGH PURITY SERIES — LUBRICANT FREE

	FLUID TEMPERATURE	MAXIMUM WORKING PRESSURE (NORMAL TEMPERATURE) (MPa)(kgf/cm ²)	CONNECTION METHOD		
			FLANGED	SOCKET	THREADED
U-PVC	0°C ~ 50°C	1.0 {10.2}	○	○	○
C-PVC	0°C ~ 90°C	1.0 {10.2}	○	○	○
PP	-20°C ~ 80°C	1.0 {10.2}	○	○	○
PVDF	-20°C ~ 100°C	1.0 {10.2}	○	○	○

NOTE (1) The ball-type valves have dead spaces for structural reasons. Note that volatile liquids, such as hydrogen peroxide (H₂O₂) and sodium hypochlorite (NaClO), vaporize in those dead spaces, which may cause abnormal pressure increase in the valve. (When the internal pressure abnormally increases due to vaporization, the gas will be compressive fluid. If the valve breaks in this state, it will be very dangerous, causing explosion and scattering of fragments.) (2) The maximum working pressure is the value including the water hammer pressure. Be careful that the maximum working pressure is not exceeded during use.

* Concerning the allowable pressure for each temperature and material, see the technical documents at the end of this catalog.

Multi Functional Handle

Removing the handle and placing the raised lugs into the carrier allow for easy disassembly of the valve.

* The handle has other colors.


(blue, white, yellow)(Option)




PARTS LIST

MANUAL


FLANGED

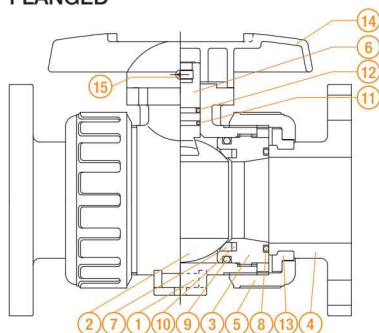


(DETAILS OF STEM)




SOCKET



THREADED



SPIGOT



(DETAILS OF ENSAF FITTING MOUNTING HOLE)

PART NO. / NAME	QTY	MATERIAL
① BODY	1	U-PVC, C-PVC, PP, PVDF
② BALL	1	U-PVC, C-PVC, PP, PVDF
③ UNION	1	U-PVC, C-PVC, PP, PVDF
④ END CONNECTOR	2	U-PVC, C-PVC, PP, PVDF
④a RING	2	SUS304 (Made of C-PVC. Used for threaded type of 15 to 25 mm.)
⑤ UNION NUT	2	U-PVC, C-PVC, PP, PVDF

PART NO. / NAME	QTY	MATERIAL
⑥ STEM	1	U-PVC, C-PVC, PP, PVDF
⑦ SEAT	2	PTFE
⑧ O-RING (A)	2	EPDM, FKM, etc.
⑨ O-RING (B)	1	EPDM, FKM, etc.
⑩ O-RING (C)	2	EPDM, FKM, etc.
⑪ O-RING (D)	1	EPDM, FKM, etc.

PART NO. / NAME	QTY	MATERIAL
⑫ O-RING (E)	1	EPDM, FKM, etc.
⑬ STOP RING	2	PVDF (Used for flanged type.)
⑭ HANDLE	1	ABS
⑮ TAPPING SCREW (A)	1	SUS304

COMPATIBLE ACTUATOR

AUTOMATIC

PNEUMATIC TYPE TA

For detailed specifications, see P.124

ELECTRIC TYPE T

For detailed specifications, see P.139

PNEUMATIC TYPE AA

For detailed specifications, see P.123

TYPE CATEGORY

MANUAL

AUTOMATIC

The types are classified according to the size and material.

SIZE	BODY MATERIAL	U-PVC	C-PVC	PP	PVDF
15mm - 50mm		TYPE 21α		TYPE 21	
65mm - 100mm		TYPE 21		TYPE 21	

PRODUCT MODEL CODE LIST	ACTUATION	TYPE	OPERATING SYSTEM	BODY MATERIAL	SEAL MATERIAL	CONNECTION	STANDARD	SIZE	HIGH PURITY SERIES
MANUAL	V	**	LV	*	*	*	*	***	1
	V MANUAL VALVE	21 TYPE 21 2A TYPE 21α	LV LEVER TYPE	U U-PVC C C-PVC P PP F PVDF	E EPDM V FKM	S SOCKET N THREADED P SPIGOT F FLANGED	J JIS D DIN A ANSI 1 JIS10K 5 5K	015 15mm 100 100mm	1 LUBRICANT FREE

PRODUCT MODEL CODE LIST	ACTUATION	TYPE	ACTUATOR TYPE	ACTION / POWER SOURCE	BODY MATERIAL	SEAL MATERIAL	CONNECTION	STANDARD	SIZE	SPACE HEATER	HIGH PURITY SERIES
AUTOMATIC	A	**	*	*	*	*	*	*	***	OC※	1
	A AUTO-MATIC VALVE	21 TYPE 21 2A TYPE 21α	PNEUMATIC K TYPE TA A TYPE AA ELECTRIC T TYPE T	PNEUMATIC F DOUBLE ACTING G AIR TO OPEN S AIR TO CLOSE ELECTRIC 1 Single-Phase 100V 2 Single-Phase 200V	U U-PVC C C-PVC P PP F PVDF	E EPDM V FKM	S SOCKET N THREADED P SPIGOT F FLANGED	J JIS D DIN A ANSI 1 JIS10K 5 JIS5K	015 15mm 100 100mm	OC OC * Indicate only for electric type only.	1 LUBRICANT FREE

NOTE (1) PP and PVDF socket types are weld type. Note, however, that JIS PP 32-mm socket type is not produced.
(2) PVDF socket type compatible with the JIS standard is not available.
(3) A handle set with a lock mechanism (for malfunction prevention) is available as an option.

Compatibility of face-to-face dimensions

Both valve face-to-face dimensions and body face-to-face dimensions are compatible between type 21α and conventional type 21. Also, a change to type 21α is available using the end connector and union nut for the existing piping (type 21).

Compatibility of parts

Some of the body component parts are not compatible between type 21α and type 21. Be careful when parts are changed on site. For details of parts compatibility, contact our sales office in your area.

Identification of product

[Difference between products] (See Fig. 1.) The body appearance of type 21α is different from that of type 21 to discriminate between them.

Related materials


Due to the modification and release of type 21α, some parts of related materials, such as outline drawing, instruction manual, and set parts list, have been revised.

Please obtain the latest version at our sales office in your area.

Performance and options

There is no change in the performance (relationship between the working pressure and temperature, Cv value, chemical resistance, etc.) and options between type 21 and 21α.

Fig. 1: Difference between products

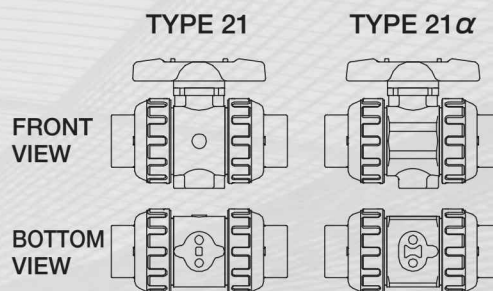


BALL VALVE TYPE 21, 21α


TYPE—V21LV, V2ALV

CONNECTION / FLANGED, SOCKET, THREADED—JIS, DIN, ANSI SPIGOT—DIN


FLANGED

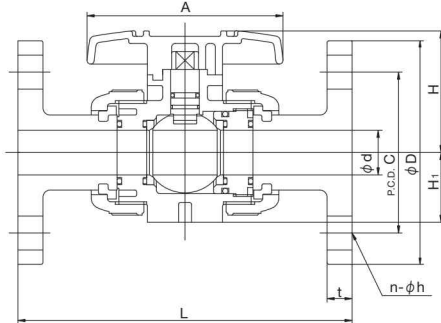


(DETAILS OF STEM)




SOCKET




THREADED



SPIGOT



(DETAILS OF ENSAT FITTING MOUNTING HOLE)



JIS, DIN (Unit: mm)

mm	d	d'	D1	D2	D3	D4	C1	H	H1	H2	H3	H4	H5	A	S	S1	S2	S3	e
10	13	-	46	-	-	-	-	43.5	-	-	-	-	-	80	-	-	-	-	-
15	15	-	48	42	25	13.5	36	51.5	29	30	6	3	8	92	10.5	19	7.3	11	5.5
20	20	-	60	42	25	15	36	59.5	35	36.5	6	3	10	100	11	19	7.3	11	5.5
25	25	-	70	42	25	15	36	68	39	43.5	6	3	10	110	11	19	7.3	11	5.5
32	32	-	82	48	30	19	42	80.5	47	52.5	8	3	10	121	15	30	9	15	5.5
40	40	-	100	57	35	23	50	89	55	61	10	3	12	131	18	30	9	15	6.5
50	51	-	126	57	35	23	50	102.5	66	72.5	10	3	12	159	18	30	9	15	6.5
65	65	58	133	81	55	30	70	126	72	85	13	3	16	200	24	48	9	6	9
80	78	68.5	152	81	55	30	70	140	85	94	13	3	19	240	24	55	11	7	9
100	100	90	210	116	70	40	102	178	110	126	16	3	23	300	34	65	11	8	11

mm	JIS																			
	FLANGED JIS5K										SOCKET									
	D	C	n	h	D	C	n	h	U-PVC C-PVC	PP	PVDF	t	d1	ℓ	1/T	L	d1	d1'	ℓ	L
15	80	60	4	12	95	70	4	15	143	143	143	12	22.11	20	1/34	109	21.2	20.2	20	108
20	85	65	4	12	100	75	4	15	172	172	172	14	26.13	24	1/34	128	26.2	25.2	23	126
25	95	75	4	12	125	90	4	19	187	187	187	14	32.16	27	1/34	145	33.0	32.0	25	141
32	115	90	4	15	135	100	4	19	190	190	190	16	38.19	30	1/34	162	-	-	-	-
40	120	95	4	15	140	105	4	19	212	212	212	16	48.21	37	1/37	189	47.0	46.0	28	171
50	130	105	4	15	155	120	4	19	234	234	234	16	60.25	42	1/37	220	59.0	58.0	28	192
65	155	130	4	15	175	140	4	19	261	257	256	18	76.60	61	1/48	273	75.0	73.0	35	219
80	180	145	4	19	185	150	8	19	306	305	302	18	89.60	64	1/49	316	88.0	86.0	35	257
100	200	165	8	19	210	175	8	19	374	374	369	18	114.70	84	1/56	419	113.0	111.0	45	341

	DIN																													
mm	FLANGED DIN PN10/PN16								SOCKET								THREADED				SPIGOT									
	L								U-PVC, C-PVC			PP, PVDF					d ₂	L			U-PVC		PP, PVDF							
	D	C	n	h	U-PVC C-PVC	PP	PVDF	t	d ₁	ℓ	L	d ₁	d ₁ '	ℓ	L			d ₃	d ₃ '	ℓ	d ₃	ℓ	t	L						
															PP	PVDF								PP	PVDF	PP	PVDF	PP	PVDF	
10	90	60	4	14	120	119	119	12	16	14	99	15.5	15.4	13	96	96	Rp3/8	15	99	98	98	16	13	16	-	-	-	-	114	114
15	95	65	4	14	130	130	130	12	20	16	102	19.5	19.3	14.5	99	99	Rp1/2	15	102	100	100	20	15	18.5	20	18.5	2.5	1.9	124	124
20	105	75	4	14	150	150	150	14	25	19	119	24.5	24.3	16	113	113	Rp3/4	17	120	119	119	25	20	24	25	22	2.7	1.9	144	144
25	115	85	4	14	160	160	160	14	32	22	131	31.5	31.3	18	123	123	Rp1	20	131	130	130	32	25	24.5	32	22.5	3.0	2.4	154	154
32	140	100	4	18	180	180	180	16	40	26	150	39.45	39.2	20.5	139	139	Rp1 1/4	22	150	146	146	40	31	28	40	26	3.7	2.4	174	174
40	150	110	4	18	200	200	200	16	50	31	164	49.45	49.2	23.5	149	149	Rp1 1/2	25	163	160	160	50	40	34	50	32	4.6	3.0	194	194
50	165	125	4	18	230	230	230	16	63	38	197	62.5	62.1	27.5	176	176	Rp2	28	197	194	194	63	51	38	63	36	5.8	3.0	224	224
65	185	145	4	18	290	288	287	18	75	44	233	74.25	73.95	31	205	204	Rp2 1/2	32	215	213	212	75	65	44	75	38	6.9	3.6	245	244
80	200	160	8	18	312	311	308	21	90	51	284	89.2	88.85	35.5	252	249	Rp3	35	265	264	261	90	80	51	90	38	8.2	4.3	296	293
100	220	180	8	18	352	352	347	18	110	61	351	109.05	108.65	41.5	312	307	Rp4	45	340	340	335	110	93.6	46	110	44.5	10.0	5.3	355	350

ANSI (Unit: inch)


inch	mm	d	d'	D1	D2	D3	D4	C1	H	H1	H2	H3	H4	H5	A	S	S1	S2	S3	e
1/2	15	0.59	-	1.89	1.65	0.98	0.53	1.42	2.03	1.14	1.18	0.24	0.12	0.31	3.62	0.41	0.75	0.29	0.43	0.22
3/4	20	0.79	-	2.36	1.65	0.98	0.59	1.42	2.34	1.38	1.44	0.24	0.12	0.39	3.94	0.43	0.75	0.29	0.43	0.22
1	25	0.98	-	2.76	1.65	0.98	0.59	1.42	2.68	1.54	1.71	0.24	0.12	0.39	4.33	0.43	0.75	0.29	0.43	0.22
1 1/4	32	1.26	-	3.23	1.89	1.18	0.75	1.65	3.17	1.85	2.07	0.31	0.12	0.39	4.76	0.59	1.18	0.35	0.59	0.22
1 1/2	40	1.57	-	3.94	2.24	1.38	0.91	1.97	3.50	2.17	2.40	0.39	0.12	0.47	5.16	0.71	1.18	0.35	0.59	0.26
2	50	2.01	-	4.96	2.24	1.38	0.91	1.97	4.04	2.60	2.85	0.39	0.12	0.47	6.26	0.71	1.18	0.35	0.59	0.26
2 1/2	65	2.56	2.28	5.24	3.19	2.17	1.18	2.76	4.96	2.83	3.35	0.51	0.12	0.63	7.87	0.94	1.89	0.35	0.24	0.35
3	80	3.07	2.70	5.98	3.19	2.17	1.18	2.76	5.51	3.35	3.70	0.51	0.12	0.75	9.45	0.94	2.17	0.43	0.28	0.35
4	100	3.94	3.54	8.27	4.57	2.76	1.57	4.02	7.01	4.33	4.96	0.63	0.12	0.91	11.81	1.34	2.56	0.43	0.31	0.43



BALL VALVE TYPE 21, 21α

TYPE—A21K, A2AK

CONNECTION / FLANGED, SOCKET, THREADED—JIS, DIN, ANSI SPIGOT—DIN

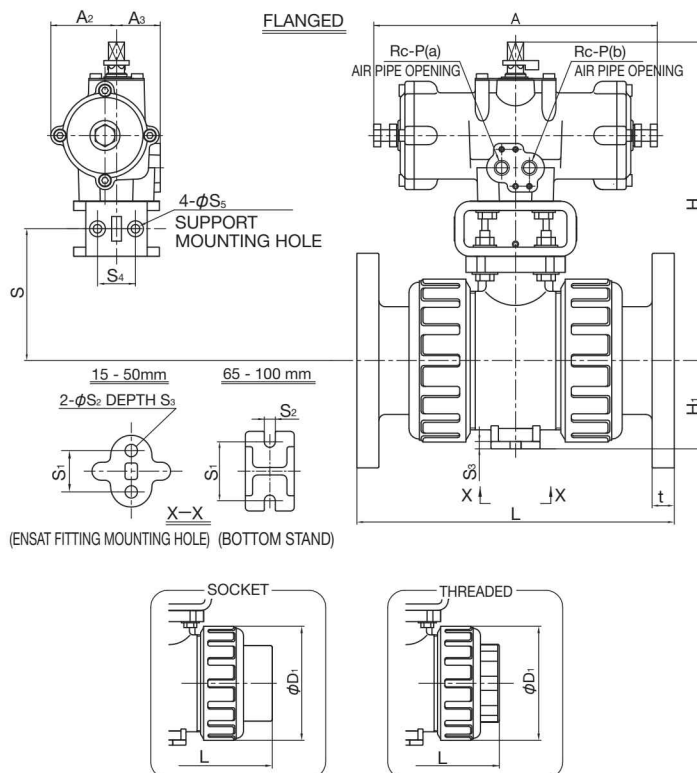

ACTUATOR SELECTION CHART

SIZE	ACTUATOR TYPE
15mm (1/2inch)	TA2A-0402D
20mm (3/4inch)	
25mm (1inch)	
32mm (1 1/4inch)	
40mm (1 1/2inch)	TA2A-050D
50mm (2inch)	
65mm (2 1/2inch)	TA2A-063D
80mm (3inch)	
100mm (4inch)	TA2A-080D

For detailed specifications, see P.124

■ JIS, DIN (Unit: mm)

mm	D ₁	H	H ₁	A	A ₂	A ₃	S	S ₁	S ₂	S ₃	S ₄	S ₅	P
15	48	159.5	29	110	25	32	-	19	7.3	11	-	-	1/8
20	60	166	35	110	25	32	-	19	7.3	11	-	-	1/8
25	70	173	39	110	25	32	-	19	7.3	11	-	-	1/8
32	82	182	47	110	25	32	-	30	9	15	-	-	1/8
40	100	224	55	210	46	46	-	30	9	15	-	-	1/4
50	126	235.5	66	210	46	46	-	30	9	15	-	-	1/4
65	133	268	72	250	57	38	107.5	48	9	6	32	7	1/4
80	152	277	85	250	57	38	116.5	55	11	7	32	7	1/4
100	210	348	110	292	71	45	151.5	65	11	8	42	9	1/4

	JIS										DIN												
mm	FLANGED JIS5K, JIS10K					SOCKET			THREADED		FLANGED DIN PN10/PN16				SOCKET			THREADED			SPIGOT		
	L				t	L		L		t	L			L			L						
	U-PVC C-PVC	PP	PVDF			U-PVC C-PVC	PP	U-PVC C-PVC	PP		PVDF	U-PVC C-PVC	PP	PVDF	U-PVC C-PVC	PP	PVDF	U-PVC C-PVC	PP	PVDF			
15	143	143	143		12	109	108	102	100	100	130	130	130	12	109	99	99	102	100	100	124	124	124
20	172	172	172		14	128	126	120	119	119	150	150	150	14	128	113	113	120	119	119	144	144	144
25	187	187	187		14	145	141	131	130	130	160	160	160	14	145	123	123	131	130	130	154	154	154
32	190	190	190		16	162	-	150	146	146	180	180	180	16	162	139	139	150	146	146	174	174	174
40	212	212	212		16	189	171	163	160	160	200	200	200	16	189	149	149	163	160	160	194	194	194
50	234	234	234		16	220	192	197	194	194	230	230	230	16	220	176	176	197	194	194	224	224	224
65	261	257	256		18	273	219	215	213	212	290	288	287	18	273	205	204	215	213	212	285	245	244
80	306	305	302		18	316	257	265	264	261	312	311	308	21	316	252	249	265	264	261	299	296	293
100	374	374	369		18	419	341	362	362	357	352	352	347	18	419	312	307	340	340	335	358	355	350

■ ANSI (Unit: inch)

■ ANSI (Unit: inch)															ANSI											
inch	mm	D ₁	H	H ₁	A	A ₂	A ₃	S	S ₁	S ₂	S ₃	S ₄	S ₅	P	FLANGED ANSI CLASS150				SOCKET			THREADED				
															L			t	L			U-PVC C-PVC	PP	PVDF		
															U-PVC C-PVC	PP	PVDF		U-PVC C-PVC	PP	PVDF				U-PVC C-PVC	PP
1/2	15	1.89	6.28	1.14	4.33	0.98	1.26	-	0.75	0.29	0.43	-	-	1/8	5.63	5.63	5.63	0.47	4.45	4.45	4.45	4.02	4.02	4.02		
3/4	20	2.36	6.54	1.38	4.33	0.98	1.26	-	0.75	0.29	0.43	-	-	1/8	6.77	6.77	6.77	0.55	5.08	5.08	5.08	4.72	4.72	4.72		
1	25	2.76	6.81	1.54	4.33	0.98	1.26	-	0.75	0.29	0.43	-	-	1/8	7.36	7.36	7.36	0.55	5.75	5.75	5.75	5.16	5.16	5.16		
1 1/4	32	3.23	7.17	1.85	4.33	0.98	1.26	-	1.18	0.35	0.59	-	-	1/8	7.48	7.48	7.48	0.63	6.46	6.46	6.46	5.91	5.91	5.91		
1 1/2	40	3.94	8.82	2.17	8.27	1.81	1.81	-	1.18	0.35	0.59	-	-	1/4	8.35	8.35	8.35	0.63	7.24	7.24	7.24	6.42	6.42	6.42		
2	50	4.96	9.27	2.60	8.27	1.81	1.81	-	1.18	0.35	0.59	-	-	1/4	9.21	9.21	9.21	0.63	8.23	8.23	8.23	7.76	7.76	7.76		
2 1/2	65	5.24	10.55	2.83	9.84	2.24	1.50	4.23	1.89	0.35	0.24	1.26	0.28	1/4	10.20	10.12	10.08	0.71	9.45	9.37	9.33	8.46	8.39	8.35		
3	80	5.98	10.91	3.35	9.84	2.24	1.50	4.59	2.17	0.43	0.28	1.26	0.28	1/4	12.05	12.01	11.89	0.71	11.14	11.10	10.98	10.43	10.39	10.28		
4	100	8.27	13.70	4.33	11.50	2.83	1.77	5.96	2.56	0.43	0.31	1.65	0.35	1/4	14.72	14.72	14.53	0.71	13.86	14.37	14.13	14.25	14.25	14.06		

AUTOMATIC

PNEUMATIC

TYPE TA

DOUBLE ACTING


AIR TO OPEN

AIR TO CLOSE

BALL VALVE TYPE 21, 21α

TYPE—A21K, A2AK

CONNECTION / FLANGED, SOCKET, THREADED—JIS, DIN, ANSI SPIGOT—DIN

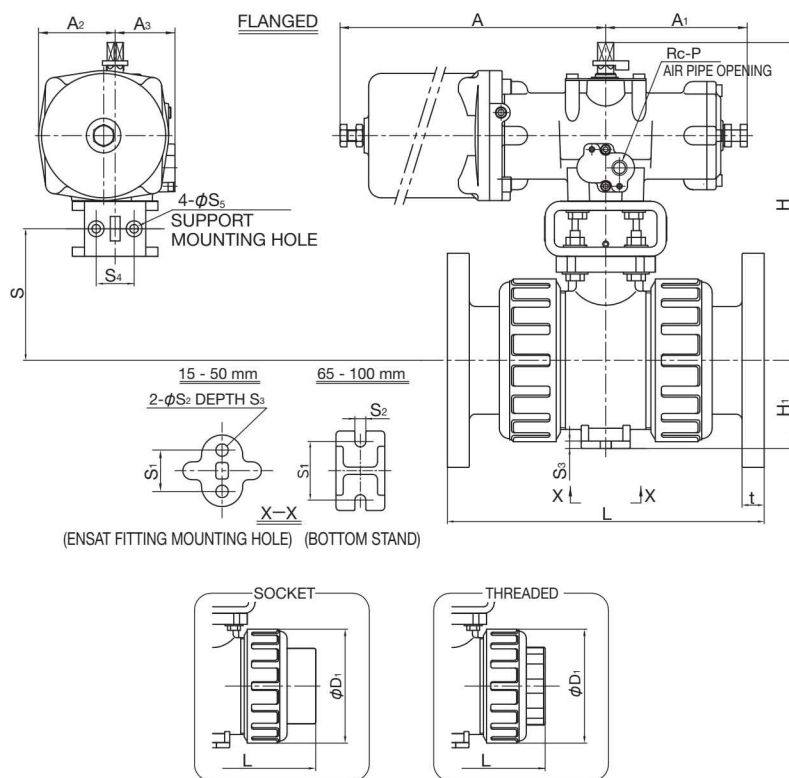

ACTUATOR SELECTION CHART

SIZE	ACTUATOR TYPE
15mm (1/2inch)	TA2A-0402R
20mm (3/4inch)	
25mm (1inch)	
32mm (1 1/4inch)	
40mm (1 1/2inch)	TA2A-050R
50mm (2inch)	
65mm (2 1/2inch)	TA2A-063R
80mm (3inch)	
100mm (4inch)	TA2A-080R

For detailed specifications, see P.124

■ JIS, DIN (Unit: mm)

mm	D1	H	H1	A	A1	A2	A3	S	S1	S2	S3	S4	S5	P
15	48	159.5	29	194	55	46	46	-	19	7.3	11	-	-	1/4
20	60	166	35	194	55	46	46	-	19	7.3	11	-	-	1/4
25	70	173	39	194	55	46	46	-	19	7.3	11	-	-	1/4
32	82	182	47	194	55	46	46	-	30	9	15	-	-	1/4
40	100	224	55	240	105	53	50	-	30	9	15	-	-	1/4
50	126	235.5	66	240	105	53	50	-	30	9	15	-	-	1/4
65	133	268	72	288	125	67	52	107.5	48	9	6	32	7	1/4
80	152	277	85	288	125	67	52	116.5	55	11	7	32	7	1/4
100	210	348	110	341	146	82.5	59	151.5	65	11	8	42	9	1/4

mm	JIS									DIN												
	FLANGED JIS5K, JIS10K				SOCKET		THREADED			FLANGED DIN PN10/PN16				SOCKET			THREADED			SPIGOT		
	L				L		L			L				L			L			L		
	U-PVC C-PVC	PP	PVDF	t	U-PVC C-PVC	PP	U-PVC C-PVC	PP	PVDF	U-PVC C-PVC	PP	PVDF	t	U-PVC C-PVC	PP	PVDF	U-PVC C-PVC	PP	PVDF	U-PVC	PP	PVDF
10	-	-	-	-	-	-	-	-	-	120	119	119	12	99	96	96	99	98	98	114	114	114
15	143	143	143	12	109	108	102	100	100	130	130	130	12	102	99	99	102	100	100	124	124	124
20	172	172	172	14	128	126	120	119	119	150	150	150	14	119	113	113	120	119	119	144	144	144
25	187	187	187	14	145	141	131	130	130	160	160	160	14	131	123	123	131	130	130	154	154	154
32	190	190	190	16	162	-	150	146	146	180	180	180	16	150	139	139	150	146	146	174	174	174
40	212	212	212	16	189	171	163	160	160	200	200	200	16	164	149	149	163	160	160	194	194	194
50	234	234	234	16	220	192	197	194	194	230	230	230	16	197	176	176	197	194	194	224	224	224
65	261	257	256	18	273	219	215	213	212	290	288	287	18	233	205	204	215	213	212	285	245	244
80	306	305	302	18	316	257	265	264	261	312	311	308	21	284	252	249	265	264	261	299	296	293
100	374	374	369	18	419	341	362	362	357	352	352	347	18	351	312	307	340	340	335	358	355	350

■ ANSI (Unit: inch)

■ ANSI (Unit: inch)																	ANSI											
inch	mm	D ₁	H	H ₁	A	A ₁	A ₂	A ₃	S	S ₁	S ₂	S ₃	S ₄	S ₅	P	FLANGED ANSI CLASS150				SOCKET			THREADED					
																L				L			L					
																U-PVC C-PVC	PP	PVDF	t	U-PVC C-PVC	PP	PVDF	U-PVC C-PVC	PP	PVDF			
1/2	15	1.89	6.28	1.14	7.64	2.17	1.81	1.81	-	0.75	0.29	0.43	-	-	1/4	5.63	5.63	5.63	0.47	4.45	4.45	4.45	4.02	4.02	4.02			
3/4	20	2.36	6.54	1.38	7.64	2.17	1.81	1.81	-	0.75	0.29	0.43	-	-	1/4	6.77	6.77	6.77	0.55	5.08	5.08	5.08	4.72	4.72	4.72			
1	25	2.76	6.81	1.54	7.64	2.17	1.81	1.81	-	0.75	0.29	0.43	-	-	1/4	7.36	7.36	7.36	0.55	5.75	5.75	5.75	5.16	5.16	5.16			
1 1/4	32	3.23	7.17	1.85	7.64	2.17	1.81	1.81	-	1.18	0.35	0.59	-	-	1/4	7.48	7.48	7.48	0.63	6.46	6.46	6.46	5.91	5.91	5.91			
1 1/2	40	3.94	8.82	2.17	9.45	4.13	2.09	1.97	-	1.18	0.35	0.59	-	-	1/4	8.35	8.35	8.35	0.63	7.24	7.24	7.24	6.42	6.42	6.42			
2	50	4.96	9.27	2.60	9.45	4.13	2.09	1.97	-	1.18	0.35	0.59	-	-	1/4	9.21	9.21	9.21	0.63	8.23	8.23	8.23	7.76	7.76	7.76			
2 1/2	65	5.24	10.55	2.83	11.34	4.92	2.64	2.05	4.23	1.89	0.35	0.24	1.26	0.28	1/4	10.20	10.12	10.08	0.71	9.45	9.37	9.33	8.46	8.39	8.35			
3	80	5.98	10.91	3.35	11.34	4.92	2.64	2.05	4.59	2.17	0.43	0.28	1.26	0.28	1/4	12.05	12.01	11.89	0.71	11.14	11.10	10.98	10.43	10.39	10.28			
4	100	8.27	13.70	4.33	13.43	5.75	3.25	2.32	5.96	2.56	0.43	0.31	1.65	0.35	1/4	14.72	14.72	14.53	0.71	13.86	14.37	14.13	14.25	14.25	14.06			




BALL VALVE TYPE 21, 21α

TYPE—A21A, A2AA

CONNECTION / FLANGED, SOCKET, THREADED—JIS, DIN, ANSI SPIGOT—DIN



FLANGED

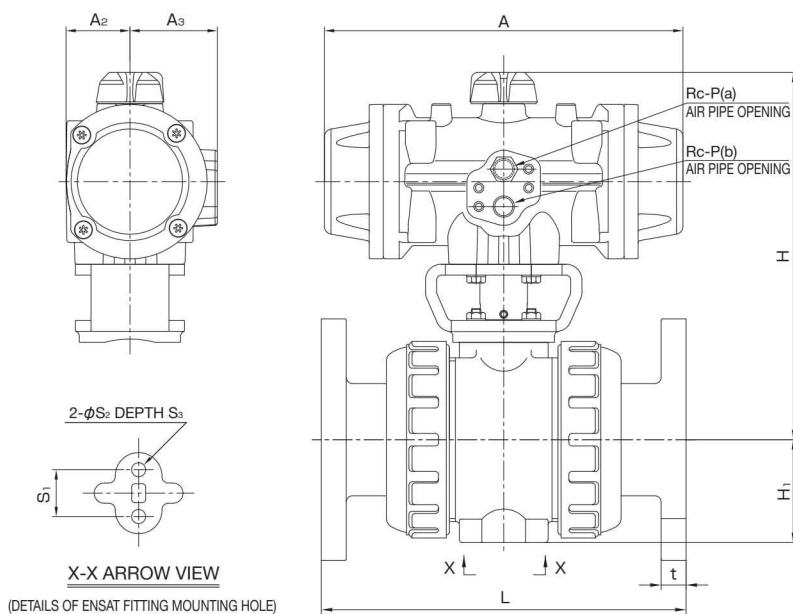

ACTUATOR SELECTION CHART

SIZE	ACTUATOR TYPE
15mm (1/2inch)	PPW
20mm (3/4inch)	
25mm (1inch)	
32mm (1 1/4inch)	
40mm (1 1/2inch)	PPOO
50mm (2inch)	

For detailed specifications, see P.123



JIS, DIN (Unit: mm)

mm	D1	H	A	A2	A3	H1	S1	S2	S3	P	JIS						DIN							
											FLANGED JISSK, JIS10K		SOCKET		THREADED		FLANGED DIN PN10/PN16		SOCKET		THREADED		SPIGOT	
											L	t	L	L	L	L	L	t	L	L	L	L	L	L
15	48	159	144	28	42	29	19	7.3	11	1/4	U-PVC, C-PVC PP, PVDF	143	12	109	108	102	100	130	12	102	99	102	100	124
20	60	165.5	144	28	42	35	19	7.3	11	1/4	U-PVC, C-PVC PP, PVDF	172	14	128	126	120	119	150	14	119	113	120	119	144
25	70	172.5	144	28	42	39	19	7.3	11	1/4	U-PVC, C-PVC PP, PVDF	187	14	145	141	131	130	160	14	131	123	131	130	154
32	82	181.5	144	28	42	47	30	9	15	1/4	U-PVC, C-PVC PP, PVDF	190	16	162	-	150	146	180	16	150	139	150	146	174
40	100	203	157	31	48	55	30	9	15	1/4	U-PVC, C-PVC PP, PVDF	212	16	189	171	163	160	200	16	164	149	163	160	194
50	126	214.5	157	31	48	66	30	9	15	1/4	U-PVC, C-PVC PP, PVDF	234	16	220	192	197	194	230	16	197	176	197	194	224

ANSI (Unit: inch)

ANSI (Unit: inch)												ANSI					
inch	mm	D ₁	H	A	A ₂	A ₃	S	S ₁	S ₂	S ₃	P	FLANGED ANSI CLASS150		SOCKET		THREADED	
												L	t	L	L		
												U-PVC, C-PVC PP, PVDF			U-PVC, C-PVC PP, PVDF		U-PVC, C-PVC PP, PVDF
1/2	15	1.89	6.26	5.67	1.10	1.65	1.14	0.75	0.29	0.43	1/4	5.63	0.47	4.45	4.02		
3/4	20	2.36	6.52	5.67	1.10	1.65	1.38	0.75	0.29	0.43	1/4	6.77	0.55	5.08	4.72		
1	25	2.76	6.79	5.67	1.10	1.65	1.54	0.75	0.29	0.43	1/4	7.36	0.55	5.75	5.16		
1 1/4	32	3.23	7.15	5.67	1.10	1.65	1.85	1.18	0.35	0.59	1/4	7.48	0.63	6.46	5.91		
1 1/2	40	3.94	7.99	6.18	1.22	1.89	2.17	1.18	0.35	0.59	1/4	8.35	0.63	7.24	6.42		
2	50	4.96	8.44	6.18	1.22	1.89	2.60	1.18	0.35	0.59	1/4	9.21	0.63	8.23	7.76		




BALL VALVE TYPE 21, 21α

TYPE—A21A, A2AA

CONNECTION / FLANGED, SOCKET, THREADED—JIS, DIN, ANSI SPIGOT—DIN



FLANGED

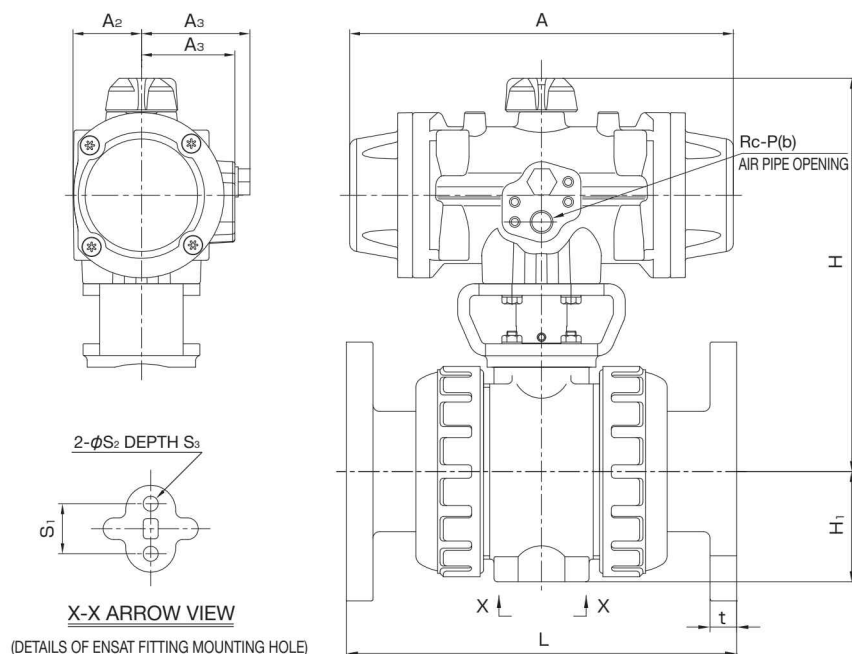

ACTUATOR SELECTION CHART

SIZE	ACTUATOR TYPE
15mm (1/2inch)	PP00S
20mm (3/4inch)	
25mm (1inch)	
32mm (1 1/4inch)	
40mm (1 1/2inch)	PP10S
50mm (2inch)	

For detailed specifications, see P.123



JIS, DIN (Unit: mm)

JIS, DIN (Unit: mm)												JIS						DIN								
												FLANGED JISSK, JIS10K		SOCKET		THREADED		FLANGED DIN PN10/PN16		SOCKET		THREADED		SPIGOT		
mm	D1	H	A	A2	A3	A3'	H1	S1	S2	S3	P	L	t	L	PP	L	PP	L	t	L	PP	L	PP	L	PP	
												U-PVC PP, PVDF	C-PVC	C-PVC	PP	U-PVC C-PVC	PP	PVDF	U-PVC PP, PVDF	t	U-PVC C-PVC	PP	PVDF	U-PVC C-PVC	PP	U-PVC PP, PVDF
15	48	172	157	31	48	57	29	19	7.3	11	1/4	143	12	109	108	102	100		130	12	102	99	102	100	124	
20	60	178.5	157	31	48	57	35	19	7.3	11	1/4	172	14	128	126	120	119		150	14	119	113	120	119	144	
25	70	185.5	157	31	48	57	39	19	7.3	11	1/4	187	14	145	141	131	130		160	14	131	123	131	130	154	
32	82	194.5	157	31	48	57	47	30	9	15	1/4	190	16	162	-	150	146		180	16	150	139	150	146	174	
40	100	224	230	41	56	65	55	30	9	15	1/4	212	16	189	171	163	160		200	16	164	149	163	160	194	
50	126	235.5	230	41	56	65	66	30	9	15	1/4	234	16	220	192	197	194		230	16	197	176	197	194	224	

ANSI (Unit: inch)

inch	mm	D1	H	A	A2	A3	A3'	H1	S1	S2	S3	P	ANSI					
													FLANGED ANSI CLASS150		SOCKET		THREADED	
													L	t	L	PP	L	PP
1/2	15	1.89	6.77	6.18	1.22	1.89	2.24	1.14	0.75	0.29	0.43	1/4	5.63	0.47	4.45	4.02	4.02	4.02
3/4	20	2.36	7.03	6.18	1.22	1.89	2.24	1.38	0.75	0.29	0.43	1/4	6.77	0.55	5.08	4.72	4.72	4.72
1	25	2.76	7.30	6.18	1.22	1.89	2.24	1.54	0.75	0.29	0.43	1/4	7.36	0.55	5.75	5.16	5.16	5.16
1 1/4	32	3.23	7.66	6.18	1.22	1.89	2.24	1.85	1.18	0.35	0.59	1/4	7.48	0.63	6.46	5.91	5.91	5.91
1 1/2	40	3.94	8.82	9.06	1.61	2.20	2.56	2.17	1.18	0.35	0.59	1/4	8.35	0.63	7.24	6.42	6.42	6.42
2	50	4.96	9.27	9.06	1.61	2.20	2.56	2.60	1.18	0.35	0.59	1/4	9.21	0.63	8.23	7.76	7.76	7.76

AUTOMATIC

PNEUMATIC

TYPE AA

DOUBLE ACTING


AIR TO OPEN

AIR TO CLOSE



BALL VALVE TYPE 21, 21 α

TYPE—A21A, A2AA

CONNECTION / FLANGED, SOCKET, THREADED—JIS, DIN, ANSI SPIGOT—DIN

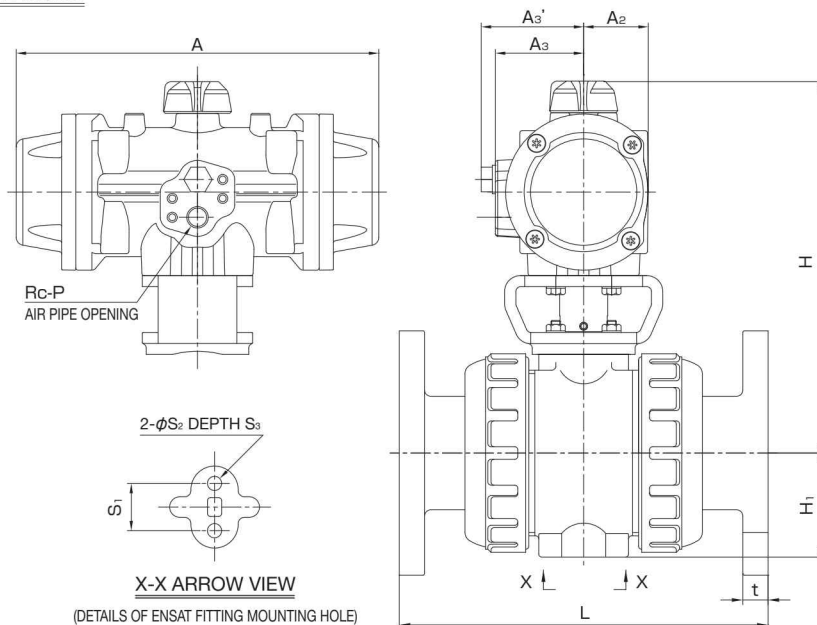FLANGED**ACTUATOR SELECTION CHART**

SIZE	ACTUATOR TYPE
15mm (1/2inch)	PP00S
20mm (3/4inch)	
25mm (1inch)	
32mm (1 1/4inch)	
40mm (1 1/2inch)	PP10S
50mm (2inch)	

For detailed specifications, see **P.123**

■ JIS, DIN (Unit: mm)

JIS, DIN (Unit: mm)												JIS						DIN							
												FLANGED JIS/K, JIS10K				SOCKET		THREADED		FLANGED DIN PN10/PN16				SOCKET	
mm	D ₁	H	A	A ₂	A ₃	A ₃ '	H ₁	S ₁	S ₂	S ₃	P	L	t	L	L	L	L	L	t	L	L	L	L	L	
												U-PVC C-PVC PP, PVDF		U-PVC C-PVC	PP	U-PVC C-PVC	PP PVDF	U-PVC C-PVC PP, PVDF	t	U-PVC C-PVC	PP PVDF	U-PVC C-PVC	PP PVDF	U-PVC C-PVC	PP PVDF
15	48	172	157	31	48	57	29	19	7.3	11	1/4	143	12	109	108	102	100	130	12	102	99	102	100	124	
20	60	178.5	157	31	48	57	35	19	7.3	11	1/4	172	14	128	126	120	119	150	14	119	113	120	119	144	
25	70	185.5	157	31	48	57	39	19	7.3	11	1/4	187	14	145	141	131	130	160	14	131	123	131	130	154	
32	82	194.5	157	31	48	57	47	30	9	15	1/4	190	16	162	-	150	146	180	16	150	139	150	146	174	
40	100	224	230	41	56	65	55	30	9	15	1/4	212	16	189	171	163	160	200	16	164	149	163	160	194	
50	126	235.5	230	41	56	65	66	30	9	15	1/4	234	16	220	192	197	194	230	16	197	176	197	194	224	

■ ANSI (Unit: inch)

inch	mm	D ₁	H	A	A ₂	A ₃	A ₃ '	H ₁	S ₁	S ₂	S ₃	P	ANSI			
													FLANGED ANSI CLASS150		SOCKET	
													L	t	L	t
1/2	15	1.89	6.77	6.18	1.22	1.89	2.24	1.14	0.75	0.29	0.43	1/4	5.63	0.47	4.45	4.02
3/4	20	2.36	7.03	6.18	1.22	1.89	2.24	1.38	0.75	0.29	0.43	1/4	6.77	0.55	5.08	4.72
1	25	2.76	7.30	6.18	1.22	1.89	2.24	1.54	0.75	0.29	0.43	1/4	7.36	0.55	5.75	5.16
1 1/4	32	3.23	7.66	6.18	1.22	1.89	2.24	1.85	1.18	0.35	0.59	1/4	7.48	0.63	6.46	5.91
1 1/2	40	3.94	8.82	9.06	1.61	2.20	2.56	2.17	1.18	0.35	0.59	1/4	8.35	0.63	7.24	6.42
2	50	4.96	9.27	9.06	1.61	2.20	2.56	2.60	1.18	0.35	0.59	1/4	9.21	0.63	8.23	7.76

AUTOMATIC

ELECTRIC

TYPE T


Single-Phase 100V
Single-Phase 200V

BALL VALVE TYPE 21, 21α

TYPE—A21T, A2AT

CONNECTION / FLANGED, SOCKET, THREADED—JIS, DIN, ANSI SPIGOT—DIN



FLANGED

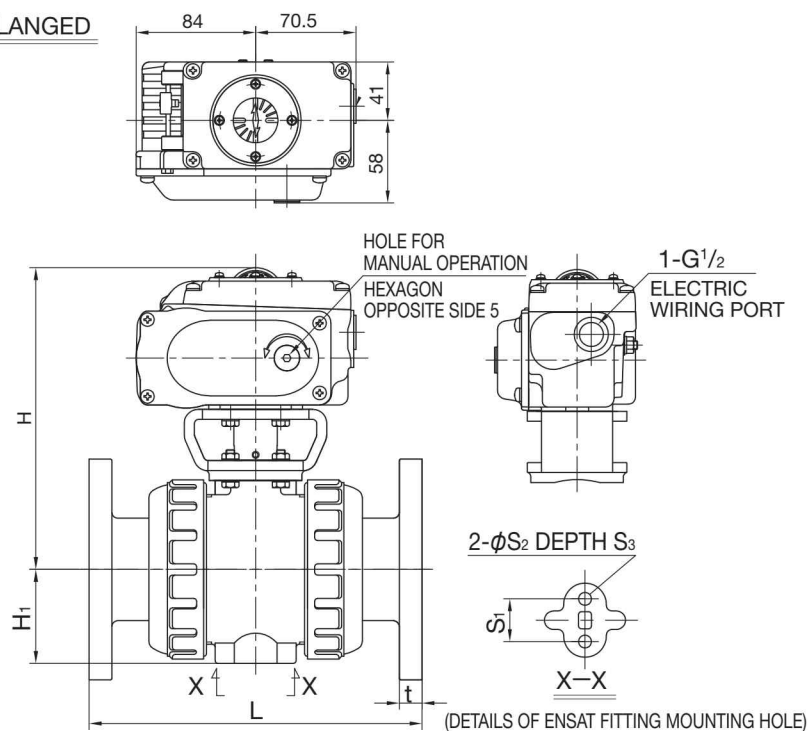

ACTUATOR SELECTION CHART

SIZE	ACTUATOR TYPE
15mm (1/2inch)	T-00
20mm (3/4inch)	
25mm (1inch)	
32mm (1 1/4inch)	
40mm (1 1/2inch)	
50mm (2inch)	

For detailed specifications, see P.139



JIS, DIN (Unit: mm)

mm	D ₁	H	H ₁	S ₁	S ₂	S ₃	JIS						DIN							
							FLANGED JIS5K, JIS10K		SOCKET		THREADED		FLANGED DIN PN10/PN16		SOCKET		THREADED		SPIGOT	
							L	t	L	L	L	L	L	t	L	L	L	L	L	L
15	48	169.5	29	19	7.3	11	143	12	109	108	102	100	130	12	102	99	102	100	124	
20	60	176	35	19	7.3	11	172	14	128	126	120	119	150	14	119	113	120	119	144	
25	70	183	39	19	7.3	11	187	14	145	141	131	130	160	14	131	123	131	130	154	
32	82	192	47	30	9	15	190	16	162	-	150	146	180	16	150	139	150	146	174	
40	100	200.5	55	30	9	15	212	16	189	171	163	160	200	16	164	149	163	160	194	
50	126	212	66	30	9	15	234	16	220	192	197	194	230	16	197	176	197	194	224	

ANSI (Unit: inch)

ANSI (Unit: inch)								ANSI			
inch	mm	D ₁	H	H ₁	S ₁	S ₂	S ₃	FLANGED ANSI CLASS150		SOCKET	THREADED
								L	t	L	L
								U-PVC, C-PVC PP, PVDF		U-PVC, C-PVC PP, PVDF	U-PVC, C-PVC PP, PVDF
1/2	15	1.96	6.67	1.14	0.75	0.29	0.43	5.63	0.47	4.45	4.02
3/4	20	2.45	6.93	1.38	0.75	0.29	0.43	6.77	0.55	5.08	4.72
1	25	2.86	7.20	1.54	0.75	0.29	0.43	7.36	0.55	5.75	5.16
1 1/4	32	4.08	7.56	1.85	1.18	0.35	0.59	7.48	0.63	6.46	5.91
1 1/2	40	4.08	7.89	2.17	1.18	0.35	0.59	8.35	0.63	7.24	6.42
2	50	5.14	8.35	2.60	1.18	0.35	0.59	9.21	0.63	8.23	7.76

AUTOMATIC

ELECTRIC


TYPE T

Single-Phase 100V
Single-Phase 200VBALL VALVE TYPE 21, 21 α

TYPE—A21T

CONNECTION / FLANGED, SOCKET, THREADED—JIS, DIN, ANSI SPIGOT—DIN



FLANGED

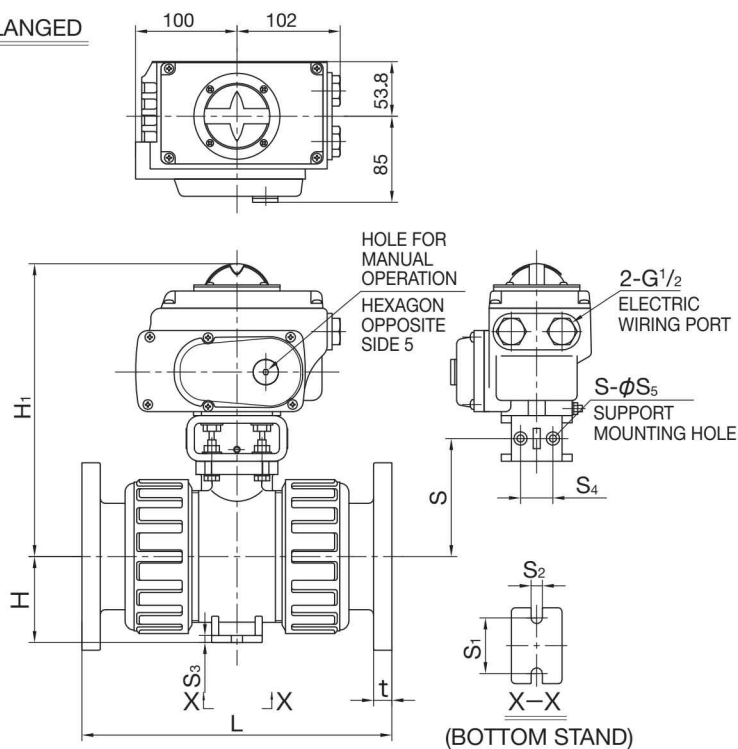

ACTUATOR SELECTION CHART

SIZE	ACTUATOR TYPE
65mm (2 1/2inch)	T-0
80mm (3inch)	
100mm (4inch)	

For detailed specifications, see P.139



■ JIS, DIN (Unit: mm)

JIS, DIN (Unit: mm)								JIS												DIN															
								FLANGED JIS5K, JIS10K				SOCKET				THREADED				FLANGED DIN PN10/PN16				SOCKET				THREADED				SPIGOT			
								L				t	L				L				L				t	L				L				L	
mm	D ₁	H	H ₁	S	S ₁	S ₂	S ₃	U-PVC C-PVC	PP	PVDF			U-PVC C-PVC	PP	U-PVC C-PVC	PP	PVDF	U-PVC C-PVC	PP	PVDF		U-PVC C-PVC	PP	PVDF		U-PVC C-PVC	PP	PVDF	U-PVC C-PVC	PP	PVDF	U-PVC	PP	PVDF	
65	133	280	72	107.5	48	9	6	261	257	256	18	273	219	215	213	212	290	288	287	18	233	205	204	215	213	212	285	245	244						
80	152	289	85	116.5	55	11	7	306	305	302	18	316	257	265	264	261	312	311	308	21	284	252	249	265	264	261	299	296	293						
100	210	327	110	151.5	65	11	8	374	374	369	18	419	341	362	362	357	352	352	347	18	351	312	307	340	340	335	358	355	350						

■ ANSI (Unit: inch)

ANSI (Unit: inch)									ANSI														
inch	mm	D ₁	H	H ₁	S	S ₁	S ₂	S ₃	FLANGED ANSI CLASS150									SOCKET			THREADED		
									L			t	L			U-PVC C-PVC	PP	PVDF	L				
									U-PVC C-PVC	PP	PVDF		U-PVC C-PVC	PP	PVDF				U-PVC C-PVC	PP	PVDF		
2 1/2	65	5.43	11.02	2.83	4.23	1.89	0.35	0.24	10.20	10.12	10.08	0.71	9.45	9.37	9.33	8.46	8.39	8.35					
3	80	6.20	11.38	3.35	4.59	2.17	0.43	0.28	12.05	12.01	11.89	0.71	11.14	11.10	10.98	10.43	10.39	10.28					
4	100	8.57	12.87	4.33	5.96	2.56	0.43	0.31	14.72	14.72	14.53	0.71	13.86	14.37	14.13	14.25	14.25	14.06					

WATER BALL VALVE (WATER ONLY)

- EQUIPPED WITH TOP FLANGE, ENABLING EASY CHANGE TO AUTOMATIC VALVE.
(Change to an automatic valve requires an actuator set.)
- TYPE 21 FOR CHEMICAL SOLUTION LINES AND WATER BALL VALVE FOR WATER/SEA WATER LINES CAN BE SELECTIVELY USED, WHICH CONTRIBUTES TO TOTAL COST REDUCTION.

BASIC SPECIFICATIONS

VALVE TYPE	WATER BALL VALVE
SIZE	15 mm—50 mm (1/2 inch—2 inch)
BODY MATERIAL	U-PVC
SEAL MATERIAL / O-RING	EPDM
CONNECTION / SOCKET	JIS
THREADED	Rc
HIGH PURITY SERIES	WETTED PARTS LUBRICANT FREE

U-PVC	FLUID TEMPERATURE	MAXIMUM WORKING PRESSURE (NORMAL TEMPERATURE) MPa(kgf/cm²)	CONNECTION METHOD	
	0℃ ~ 50℃	1.0 {10.2}	SOCKET	THREADED
			○	○

NOTE (1) The water ball valves are dedicated for water/sea water lines. They cannot be used for chemical solution lines. (2) For chemical solution lines, use the ball valve type 21 or compact ball valve. (3) The face-to-face dimensions and parts are not compatible between the water ball valve and the ball valve type 21α. (4) Parts for the water ball valve are not sold separately. (5) For switching from a manual valve to an automatic valve, order an actuator set.

* Concerning the allowable pressure for each temperature and material, see the technical documents at the end of this catalog.



MANUAL




AUTOMATIC

PARTS LIST

SOCKET

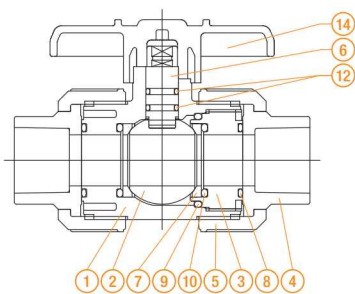

THREADED



PART NO. / NAME	QTY	MATERIAL
1 BODY	1	U-PVC
2 BALL	1	U-PVC
3 UNION	1	U-PVC
4 END CONNECTOR	2	U-PVC
5 UNION NUT	2	U-PVC
6 STEM	1	U-PVC

PART NO. / NAME	QTY	MATERIAL
7 SEAT	2	PTFE
8 O-RING (A)	2	EPDM
9 O-RING (B)	1	EPDM
10 O-RING (C)	2	EPDM
12 O-RING (E)	2	EPDM
14 HANDLE	1	ABS

COMPATIBLE ACTUATOR

PNEUMATIC

TYPE VC

For detailed specifications, see P.125

ELECTRIC

TYPE V


For detailed specifications, see P.143

MANUAL

AUTOMATIC

MANUAL

CONNECTION / SOCKET, THREADED—JIS

054

AUTOMATIC

PNEUMATIC

TYPE VC

DOUBLE ACTING

AIR TO OPEN




AIR TO CLOSE

WATER BALL VALVE


TYPE—AWBC

CONNECTION / SOCKET, THREADED—JIS

SOCKET

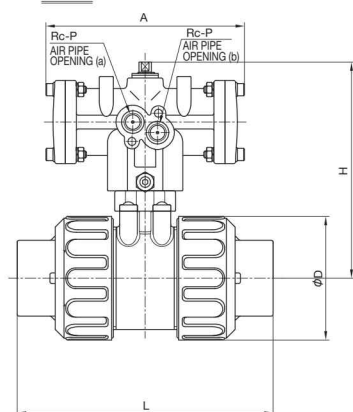

ACTUATOR SHAPE FOR PND-03S



ACTUATOR SELECTION CHART

SIZE	ACTUATOR TYPE
15mm (1/2inch)	PND-03S
20mm (3/4inch)	
25mm (1inch)	
32mm (1 1/4inch)	PND-03D
40mm (1 1/2inch)	PND-04D
50mm (2inch)	

For detailed specifications, see P.125

■ JIS (Unit: mm)

mm	D	H	A	A ₂	A ₃	P	JIS	
							SOCKET	THREADED
							L	
15	48	96.5	83	24	30	1/8	104	98
20	60	107	83	24	30	1/8	128	119
25	70	122.5	113	24	30	1/8	145	135
32	80	145.5	113	24	30	1/8	162	150
40	96	169	132	31	36	1/8	189	170
50	120	177	132	31	36	1/8	220	198

AUTOMATIC

PNEUMATIC

TYPE VC

DOUBLE ACTING

AIR TO OPEN




AIR TO CLOSE

WATER BALL VALVE

TYPE—AWBC

CONNECTION / SOCKET, THREADED—JIS

SOCKET

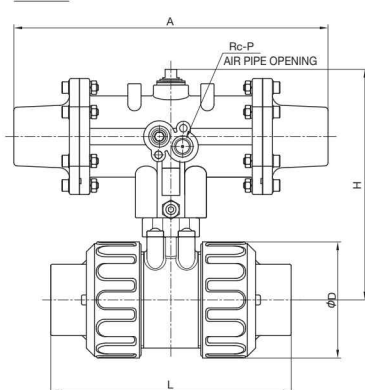

ACTUATOR SELECTION CHART

SIZE	ACTUATOR TYPE	
	AIR TO OPEN	AIR TO CLOSE
15mm (1/2inch)	PSO-03D	PSC-03D
20mm (3/4inch)		PSC-03D
25mm (1inch)		PSC-04D
32mm (1 1/4inch)	PSO-04W	PSC-04W
40mm (1 1/2inch)		PSC-04W
50mm (2inch)		PSC-04W

For detailed specifications, see P.125

■ JIS (Unit: mm)

mm	D	H	A	A ₂	A ₃	P	JIS	
							SOCKET	THREADED
							L	
15	48	105	165	24	30	1/8	104	98
20	60	115.5	165	24	30	1/8	128	119
25	70	139	190	31	36	1/8	145	135
32	80	162	279	31	36	1/8	162	150
40	96	169	279	31	36	1/8	189	170
50	120	177	279	31	36	1/8	220	198

AUTOMATIC

ELECTRIC


TYPE V

Single-Phase 100V
Single-Phase 200V
DC24V

WATER BALL VALVE

TYPE——AWBV

CONNECTION / SOCKET, THREADED——JIS

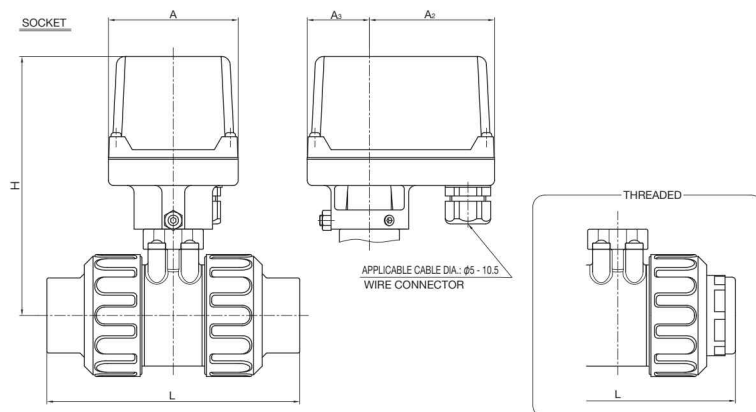

ACTUATOR SELECTION CHART

SIZE	ACTUATOR TYPE	
	AC100V AC200V	DC24V
15mm (1/2inch)	AM1-030	DM2-030
20mm (3/4inch)		
25mm (1inch)	AM1-070	DM2-070
32mm (1 1/4inch)		
40mm (1 1/2inch)	AM1-180	DM2-180
50mm (2inch)		

For detailed specifications, see P.143

■ JIS (Unit: mm)

mm	H	A	A2	A3	JIS	
					SOCKET	THREADED
					L	
15	131	74	71	36	104	98
20	141.5	74	71	36	128	119
25	148.5	74	71	36	145	135
32	213.5	74	54	53	162	150
40	220.5	74	54	53	189	170
50	228.5	74	54	53	220	198

3 WAY BALL VALVE TYPE 23

- ENABLES SWITCHING BETWEEN TWO FLOW PATHS AND COMPLETE CLOSING. (ONLY ONE VALVE IS NECESSARY IN A LINE CONVENTIONALLY REQUIRING TWO BALL VALVES.)
- THE SHAPE OF VALVE ELEMENT (BALL) IS SELECTABLE FROM THREE KINDS, ALLOWING FOR SWITCHING OF FLOW DIRECTION ACCORDING TO THE APPLICATION.

BASIC SPECIFICATIONS

VALVE TYPE	3 WAY BALL VALVE TYPE 23			
SIZE	15 mm—100 mm (1/2 inch—4 inch)			
BODY MATERIAL	U-PVC	C-PVC	PP	PVDF
SEAL MATERIAL / O-RING	EPDM	FKM	etc.	
CONNECTION / FLANGED	JIS5K, JIS10K, DIN PN10, ANSI CLASS150			
SOCKET	JIS, DIN, ANSI			
THREADED	Rc, Rp, NPT			
PORT	DOUBLE L PORT, CROSS PORT, L PORT			
HIGH PURITY SERIES	LUBRICANT FREE			

	FLUID TEMPERATURE	MAXIMUM WORKING PRESSURE (NORMAL TEMPERATURE) (MPa)(kgf/cm ²)	CONNECTION METHOD		
			FLANGED	SOCKET	THREADED
U-PVC	0°C ~ 50°C	1.0 {10.2}	○	○	○
C-PVC	0°C ~ 90°C	1.0 {10.2}	○	○	○
PP	-20°C ~ 80°C	1.0 {10.2}	○	○	○
PVDF	-20°C ~ 100°C	1.0 {10.2}	○	○	○

NOTE (1) The ball-type valves have dead spaces for structural reasons. Note that volatile liquids, such as hydrogen peroxide (H₂O₂) and sodium hypochlorite (NaClO), vaporize in those dead spaces, which may cause abnormal pressure increase in the valve. (When the internal pressure abnormally increases due to vaporization, the gas will be compressive fluid. If the valve breaks in this state, it will be very dangerous, causing explosion and scattering of fragments.) (2) The maximum working pressure is the value including the water hammer pressure. Be careful that the maximum working pressure is not exceeded during use.

* Concerning the allowable pressure for each temperature and material, see the technical documents at the end of this catalog.


MANUAL



AUTOMATIC




PARTS LIST

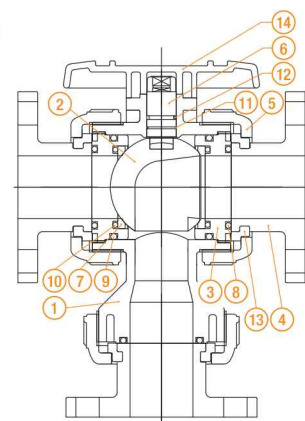


FLANGED


65 mm - 100 mm

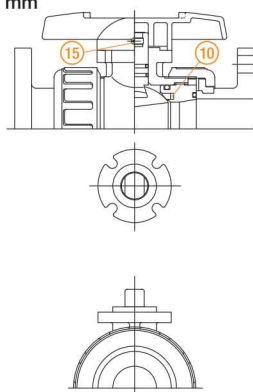

SOCKET



THREADED



PART NO. / NAME	QTY	MATERIAL
① BODY	1	U-PVC, C-PVC, PP, PVDF
② BALL	1	U-PVC, C-PVC, PP, PVDF
③ UNION	2	U-PVC, C-PVC, PP, PVDF
④ END CONNECTOR	3	U-PVC, C-PVC, PP, PVDF
4a RING	3	SUS304 (Used for C-PVC 15-, 20-, or 25-mm threaded type)
⑤ UNION NUT	3	U-PVC, C-PVC, PP, PVDF

PART NO. / NAME	QTY	MATERIAL
⑥ STEM	1	U-PVC, C-PVC, PP, PVDF
⑦ SEAT	2	PTFE
⑧ O-RING (A)	3	EPDM, FKM, etc.
⑨ O-RING (B)	2	EPDM, FKM, etc.
10 O-RING (C)	2	EPDM, FKM, etc. (Used for 15 to 50 mm)
10 CUSHION	2	EPDM, FKM, etc. (Used for 65 - 100 mm)

PART NO. / NAME	QTY	MATERIAL
11 O-RING (D)	1	EPDM, FKM, etc.
12 O-RING (E)	1	EPDM, FKM, etc.
13 STOP RING	3	PVDF (Used for flanged type)
14 HANDLE	1	ABS
15 TAPPING SCREW (A)	1	SUS304 (Used for 65 to 100 mm)

COMPATIBLE ACTUATOR

AUTOMATIC

PNEUMATIC TYPE TA

For detailed specifications, see P.124

ELECTRIC TYPE T

For detailed specifications, see P.139

FLOW DIRECTION DIAGRAM FOR EACH HANDLE ROTATION ANGLE

MANUAL AUTOMATIC

For details of flow direction diagram, see **OP.058**.

PRODUCT MODEL
CODE LIST

MANUAL

ACTUATION	TYPE	OPERATING SYSTEM	BODY MATERIAL	SEAL MATERIAL	CONNECTION	STANDARD	SIZE	HIGH PURITY SERIES
V	23	LV	*	*	*	*	***	1
V	23	LV	U U-PVC C C-PVC P PP F PVDF	E EPDM V FKM	S SOCKET N THREADED P SPIGOT F FLANGED	J JIS D DIN 1 JIS10K 5 JIS5K A ANSI	015 15mm 100 100mm	1 LUBRICANT FREE

PRODUCT MODEL
CODE LIST

AUTOMATIC

ACTUATION	TYPE	ACTUATOR TYPE	ACTION / POWER SOURCE	BODY MATERIAL	SEAL MATERIAL	CONNECTION	STANDARD	SIZE	SPACE HEATER	HIGH PURITY SERIES
A	23	*	*	*	*	*	*	***	OC*	1
A	23	PNEUMATIC K TYPE TA ELECTRIC T TYPE T	PNEUMATIC F DOUBLE ACTING G AIR TO OPEN S AIR TO CLOSE ELECTRIC 1 Single-Phase 100V 2 Single-Phase 200V	U U-PVC C C-PVC P PP F PVDF	E EPDM V FKM	S SOCKET N THREADED P SPIGOT F FLANGED	J JIS D DIN 1 JIS10K 5 JIS5K A ANSI	015 15mm 100 100mm	OC OC * Indicate only for electric type only.	1 LUBRICANT FREE

FLOW DIRECTION DIAGRAM MANUAL AUTOMATIC

THE DIRECTION OF FLOW IS SELECTABLE ACCORDING TO THE APPLICATION.

THREE TYPES OF VALVE ELEMENT (BALL) ARE AVAILABLE: "L PORT", "DOUBLE L PORT" AND "CROSS PORT".
THE DIRECTION OF FLOW CAN BE SWITCHED ACCORDING TO THE APPLICATION.

	COMPATIBLE ACTUATION METHOD	ROTATION ANGLE					BALL SHAPE
		0°	45°	90°	135°	180°	
L PORT (90° or 180°)	MANUAL ○						
	ELECTRIC △						
DOUBLE L PORT (90°)	MANUAL △						
	PNEUMATIC ○						
	ELECTRIC ○						
CROSS PORT (90° or 180°) * For 15 - 50 mm only.	MANUAL △						
	PNEUMATIC △						
	ELECTRIC △						

○ indicates standard products. △ indicates optional products.

* Our products are vertical type. The double L port and cross port cannot completely stop the flow in three directions. * For automatic valves, the direction of flow is determined as follows according to the operation system:



Air to open: Right opens during air supply. Air to close: Left opens during air supply. Double acting: Right opens during air supply on ① side. Left opens during air supply on ② side.

* Also for the solenoid valve, the right side opens when energized and the left side opens when de-energized.


3 WAY BALL VALVE TYPE 23

TYPE—V23LV


CONNECTION / FLANGED, SOCKET, THREADED—JIS, DIN, ANSI SPIGOT—DIN



FLANGED

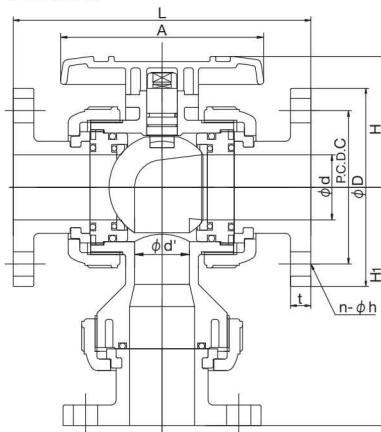

65 mm - 100 mm

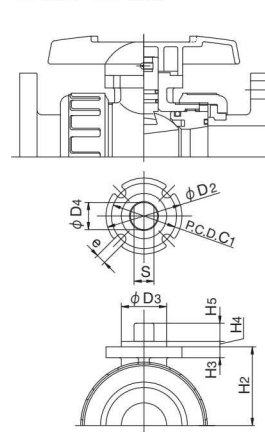

■ JIS, DIN (Unit: mm)

mm	d	d'	D1	D2	D3	D4	C1	H	H2	H3	H4	H5	A	S	e
15	15	15	48	42	25	13.5	36	51.5	30.0	6	3	8	92	10.5	5.5
20	20	20	60	42	25	15	36	59.5	36.5	6	3	10	100	11	5.5
25	25	25	70	42	25	15	36	68.0	43.5	6	3	10	110	11	5.5
32	40	32	100	57	35	23	50	89.0	61.0	10	3	12	131	18	6.5
40	40	32	100	57	35	23	50	89.0	61.0	10	3	12	131	18	6.5
50	51	43	126	57	35	23	50	102.5	72.5	10	3	12	159	18	6.5
65	78	58	152	81	55	30	70	140.0	94.0	13	3	19	240	24	9.0
80	78	58	152	81	55	30	70	140.0	94.0	13	3	19	240	24	9.0
100	100	78	210	116	70	40	102	178.0	126.0	16	3	23	300	34	11.0

JIS

mm	FLANGED												SOCKET												THREADED			
	JIS5K						JIS10K						U-PVC, C-PVC						PP									
	D	C	n	h	L	t	H1	d1	ℓ	L	H1	d1	ℓ	L	H1	d1	d1'	ℓ	L	H1	d2	ℓ	L	H1	d2	ℓ	L	H1
15	80	60	4	12	95	70	4	15	143	12	94	22.11	20	1/34	108	77	21.2	20.2	20	108	77	Rc 1/2	15	102	74			
20	85	65	4	12	100	75	4	15	172	14	115	26.13	24	1/34	128	93	26.2	25.2	23	126	92	Rc 3/4	17	120	89			
25	95	75	4	12	125	90	4	19	187	14	133	32.16	27	1/34	145	112	33.0	32.0	25	141	110	Rc 1	20	131	105			
32	115	90	4	15	135	100	4	19	212	16	165	38.19	30	1/34	174	146.5	-	-	-	-	-	Rc 1 1/4	22	163	141			
40	120	95	4	15	140	105	4	19	212	16	165	48.21	37	1/37	189	154	47.0	46.0	28	171	145	Rc 1 1/2	25	163	141			
50	130	105	4	15	155	120	4	19	234	16	187	60.25	42	1/37	220	180	59.0	58.0	28	192	166	Rc 2	28	197	168			
65	155	130	4	15	175	140	4	19	304	18	256	76.60	61	1/48	316	261	74.25	73.96	31	264	235	Rc 2 1/2	32	264	235			
80	180	145	4	19	185	150	8	19	304	18	256	89.60	64	1/49	316	261	89.2	88.85	35.5	258	232	Rc 3	35	264	235			
100	200	165	8	19	210	175	8	19	372	18	305	114.70	84	1/56	418	328	109.05	108.65	41.5	340	289	Rc 4	45	360	299			

DIN

mm	FLANGED																SOCKET												THREADED				SPIGOT											
	DIN PN10						U-PVC, C-PVC						PP, PVDF(DIN)						d ₂	ℓ	L	H ₁	U-PVC				PP, PVDF																	
	D	C	n	h	L	t	H ₁	d ₁	ℓ	L	H ₁	d ₁	d ₁ '	ℓ	L	H ₁	d ₃	d ₃ '					ℓ	H ₁	d ₃	ℓ	t	L	H ₁															
15	95	65	4	14	130	12	88	20	16	102	72	19.50	19.30	14.5	99	71	Rp1/2	15	102	74	20	15	18.5	83	20	18.5	2.5	1.9	124	83														
20	105	75	4	14	150	14	104	25	19	120	85	24.50	24.30	16	114	83	Rp3/4	17	120	89	25	20	24	99	25	22	2.7	1.9	144	99														
25	115	85	4	14	160	14	120	32	22	131	104	31.50	31.30	18	123	100	Rp1	20	131	105	32	25	24.5	115	32	22.5	3.0	2.4	154	115														
32	140	100	4	18	212	16	165	40	26	173	147	39.45	39.2	20.5	148	131	Rp1 1/4	22	163	141	-	-	-	-	-	-	-	-	-	-														
40	150	110	4	18	200	16	159	50	31	163	142	49.45	49.20	23.5	148	131	Rp1 1/2	25	163	141	50	40	34	153	50	32	4.6	3.0	194	153														
50	165	125	4	18	230	16	185	63	38	197	170	62.50	62.10	27.5	176	154	Rp2	28	197	168	63	51	38	178	63	36	5.8	3.0	224	178														
65	185	145	4	18	304	18	256	75	44	282	245	74.25	73.95	31	256	227	Rp2 1/2	32	264	235	-	-	-	-	-	-	-	-	-	-														
80	200	160	8	18	310	21	259	90	51	282	245	89.20	88.85	35.5	251	224	Rp3	35	264	235	90	80	51	252	90	38	8.2	4.3	295	246														
100	220	180	8	18	350	18	305	110	61	349	305	109.05	108.65	41.5	310	279	Rp4	45	338	299	110	93.6	61	308	110	44.5	10.0	5.3	353	301														

■ ANSI (Unit: inch)

inch	mm	d	d'	D1	D2	D3	D4	C1	H	H2	H3	H4	H5	A	S	e
1/2	15	0.59	0.59	1.89	1.65	0.98	0.53	1.42	2.03	1.18	0.24	0.12	0.31	3.62	0.41	0.22
3/4	20	0.79	0.79	2.36	1.65	0.98	0.59	1.42	2.34	1.44	0.24	0.12	0.39	3.94	0.43	0.22
1	25	0.98	0.98	2.76	1.65	0.98	0.59	1.42	2.68	1.71	0.24	0.12	0.39	4.33	0.43	0.22
1 1/4	32	1.57	1.26	3.94	2.24	1.38	0.91	1.97	3.50	2.40	0.39	0.12	0.47	5.16	0.71	0.26
1 1/2	40	1.57	1.26	3.94	2.24	1.38	0.91	1.97	3.50	2.40	0.39	0.12	0.47	5.16	0.71	0.26
2	50	2.01	1.69	4.96	2.24	1.38	0.91	1.97	4.04	2.85	0.39	0.12	0.47	6.26	0.71	0.26
2 1/2	65	3.07	2.28	5.98	3.19	2.17	1.18	2.76	5.51	3.70	0.51	0.12	0.75	9.45	0.94	0.35
3	80	3.07	2.28	5.98	3.19	2.17	1.18	2.76	5.51	3.70	0.51	0.12	0.75	9.45	0.94	0.35
4	100	3.94	3.07	8.27	4.57	2.76	1.57	4.02	7.01	4.96	0.63	0.12	0.91	11.81	1.34	0.43

ANSI

inch	mm	FLANGED								SOCKET												THREADED			
		ANSI CLASS 150						U-PVC, C-PVC						PP, PVDF											
		D	C	n	h	L	t	H ₁	ASTM SCH40				ASTM SCH80				d ₁	ℓ	L	H ₁	d ₂	ℓ	L	H ₁	
1/2	15	3.50	2.38	4	0.62	5.63	0.47	3.70	-	-	-	-	0.848	0.836	0.875	4.45	3.08	0.83	0.870	4.45	3.09	1/2-14 NPT	0.59	4.02	2.89
3/4	20	3.88	2.75	4	0.62	6.77	0.55	4.50	-	-	-	-	1.058	1.046	1.000	5.08	3.56	1.03	1.000	5.08	3.61	3/4-14 NPT	0.67	4.72	3.48
1	25	4.25	3.12	4	0.62	7.36	0.55	5.24	-	-	-	-	1.325	1.310	1.125	5.75	4.32	1.30	1.130	5.75	4.37	1-11 1/2 NPT	0.79	5.16	4.13
1 1/4	32	4.62	3.50	4	0.62	8.35	0.63	6.50	-	-	-	-	1.670	1.655	1.250	6.85	5.51	1.65	1.250	7.04	5.75	1 1/4-11 1/2 NPT	0.87	6.42	5.53
1 1/2	40	5.00	3.88	4	0.62	8.35	0.63	6.50	-	-	-	-	1.912	1.894	1.375	7.24	5.71	1.89	1.370	7.24	5.85	1 1/2-11 1/2 NPT	0.98	6.42	5.53
2	50	6.00	4.75	4	0.75	9.21	0.63	7.34	-	-	-	-	2.387	2.369	1.500	8.23	6.66	2.36	1.500	8.23	6.76	2-11 1/2 NPT	1.10	7.76	6.61
2 1/2	65	7.00	5.50	4	0.75	11.97	0.71	10.06	-	-	-	-	2.889	2.868	1.750	11.21	9.65	2.88	1.752	11.21	9.65	2 1/2-8 NPT	1.26	10.39	9.25
3	80	7.50	6.00	4	0.75	11.97	0.71	10.06	-	-	-	-	3.516	3.492	1.875	11.10	9.59	3.48	1.874	11.10	11.10	3-8 NPT	1.38	10.39	9.25
4	100	9.00	7.50	8	0.75	14.66	0.71	12.01	4.518	4.491	2.000	13.90	-	-	-	-	11.58	4.48	2.252	14.37	14.37	4-8 NPT	1.77	14.17	11.77

AUTOMATIC

PNEUMATIC

TYPE TA

DOUBLE ACTING


AIR TO OPEN

AIR TO CLOSE

3 WAY BALL VALVE TYPE 23

TYPE—A23K

CONNECTION / FLANGED, SOCKET, THREADED—JIS, DIN, ANSI

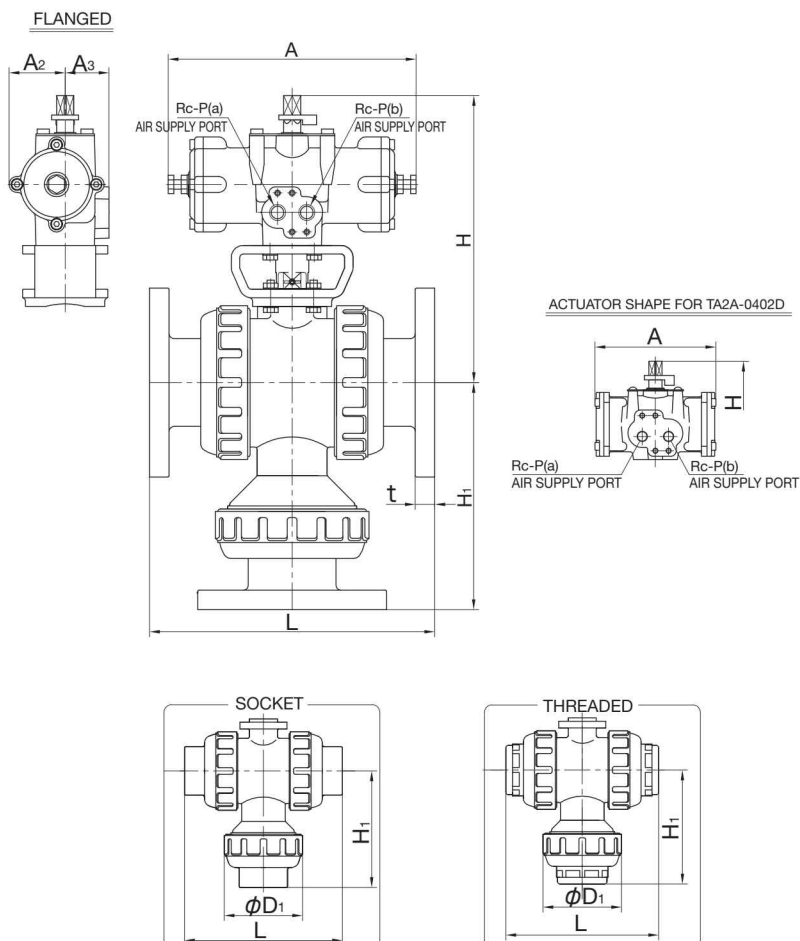

ACTUATOR SELECTION CHART

SIZE	ACTUATOR TYPE
15mm (1/2inch)	TA2A-0402D
20mm (3/4inch)	
25mm (1inch)	
32mm (1 1/4inch)	TA2A-050D
40mm (1 1/2inch)	
50mm (2inch)	
65mm (2 1/2inch)	TA2A-063D
80mm (3inch)	
100mm (4inch)	TA2A-080D

For detailed specifications, see P.124

■ JIS, DIN (Unit: mm)

mm	D ₁	H	H ₁	A	A ₂	A ₃	P	JIS												DIN							
								FLANGED JIS10K				SOCKET				THREADED				FLANGED DIN PN10				SOCKET			
								L	t	H ₁	U-PVC, C-PVC	PP	L	H ₁	L	H ₁	L	H ₁	L	t	H ₁	U-PVC, C-PVC	PP	L	H ₁	L	H ₁
15	48	159.5	29	110	25	32	1/8	143	12	94	108	77	108	77	102	74	130	12	88	102	72	99	71	102	74	102	74
20	60	166	35	110	25	32	1/8	172	14	115	128	93	126	92	120	89	150	14	104	120	85	114	83	120	89	120	89
25	70	173	39	110	25	32	1/8	187	14	133	145	112	141	110	131	105	160	14	120	131	104	123	100	131	105	131	105
32	100	224	55	210	46	36	1/4	212	16	165	174	154	-	-	163	141	212	16	165	173	147	148	131	163	141	163	141
40	100	224	55	210	46	36	1/4	212	16	165	189	154	171	145	163	141	200	16	159	163	142	148	131	163	141	131	141
50	126	235.5	66	210	46	36	1/4	234	16	187	220	180	192	166	197	168	230	16	185	197	170	176	154	197	168	197	168
65	152	277	85	250	57	38	1/4	304	18	256	316	261	264	235	264	235	304	18	256	282	245	256	227	264	235	264	235
80	152	277	85	250	57	38	1/4	304	18	256	316	261	258	232	264	235	310	21	259	282	245	251	224	264	235	264	235
100	210	348	110	292	71	45	1/4	372	18	305	418	328	340	289	360	299	350	18	305	349	305	310	279	338	299	338	299

■ ANSI (Unit: inch)

inch	mm	D ₁	H	H ₁	A	A ₂	A ₃	P	ANSI												ANSI							
									FLANGED ANSI CLASS150				SOCKET				THREADED				FLANGED ANSI CLASS150				SOCKET			
									L	t	H ₁	U-PVC, C-PVC	PP, PVDF	L	H ₁	L	H ₁	L	H ₁	L	t	H ₁	U-PVC, C-PVC	PP, PVDF	L	H ₁	L	H ₁
1/2	15	1.89	6.28	1.14	4.33	0.98	1.26	1/8	5.63	0.47	3.70	4.45	3.08	4.45	3.09	4.02	2.89	5.63	0.47	3.70	4.45	3.08	4.45	3.09	4.02	2.89	4.02	2.89
3/4	20	2.36	6.54	1.38	4.33	0.98	1.26	1/8	6.77	0.55	4.50	5.08	3.56	5.08	3.61	4.72	3.48	6.77	0.55	4.50	5.08	3.56	5.08	3.61	4.72	3.48	4.72	3.48
1	25	2.76	6.81	1.54	4.33	0.98	1.26	1/8	7.36	0.55	5.24	5.75	4.32	5.75	4.37	5.16	4.13	7.36	0.55	5.24	5.75	4.32	5.75	4.37	5.16	4.13	5.16	4.13
1 1/4	32	3.94	8.82	2.17	8.27	1.81	1.42	1/4	8.35	0.63	6.50	6.85	5.51	7.04	5.75	6.42	5.53	8.35	0.63	6.50	7.24	5.71	7.24	5.85	6.42	5.53	6.42	5.53
1 1/2	40	3.94	8.82	2.17	8.27	1.81	1.42	1/4	8.35	0.63	6.50	7.24	5.71	7.24	5.85	6.42	5.53	8.35	0.63	6.50	7.24	5.71	7.24	5.85	6.42	5.53	6.42	5.53
2	50	4.96	9.27	2.60	8.27	1.81	1.42	1/4	9.21	0.63	7.34	8.23	6.66	8.23	6.76	7.76	6.61	9.21	0.63	7.34	8.23	6.66	8.23	6.76	7.76	6.61	7.76	6.61
2 1/2	65	5.98	10.91	3.35	9.84	2.24	1.50	1/4	11.97	0.71	10.06	11.21	9.65	11.21	9.65	10.39	9.25	11.97	0.71	10.06	11.21	9.65	11.21	9.65	10.39	9.25	10.39	9.25
3	80	5.98	10.91	3.35	9.84	2.24	1.50	1/4	11.97	0.71	10.06	11.21	9.65	11.21	9.65	10.39	9.25	11.97	0.71	10.06	11.21	9.65	11.21	9.65	10.39	9.25	10.39	9.25
4	100	8.27	13.70	4.33	11.50	2.80	1.77	1/4	14.66	0.71	12.01	13.90	11.58	14.37	14.37	14.17	11.77	14.66	0.71	12.01	13.90	11.58	14.37	14.37	14.17	11.77	14.17	11.77




3 WAY BALL VALVE TYPE 23


TYPE—A23K

CONNECTION / FLANGED, SOCKET, THREADED—JIS, DIN, ANSI

FLANGED

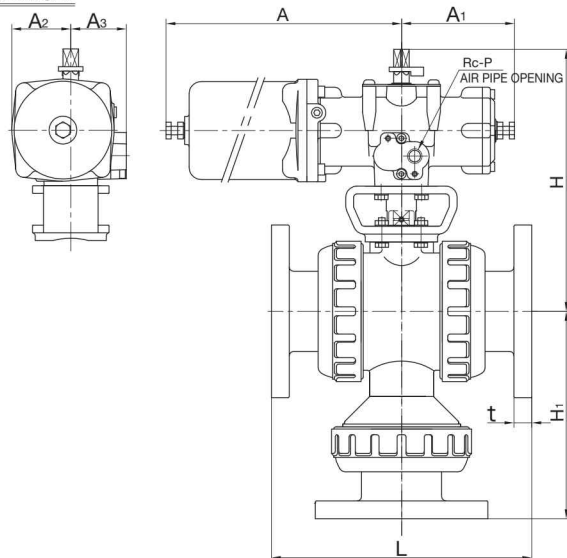



ACTUATOR SHAPE FOR TA2A-0402R



ACTUATOR SELECTION CHART

SIZE	ACTUATOR TYPE
15mm (1/2inch)	TA2A-0402R
20mm (3/4inch)	
25mm (1inch)	
32mm (1 1/4inch)	TA2A-050R
40mm (1 1/2inch)	
50mm (2inch)	TA2A-063R
65mm (2 1/2inch)	
80mm (3inch)	TA2A-080R
100mm (4inch)	

For detailed specifications, see P.124



■ JIS, DIN (Unit: mm)

JIS, DIN (Unit: mm)										JIS								DIN									
										FLANGED JIS10K			SOCKET				THREADED		FLANGED DIN PN10			SOCKET				THREADED	
										mm	D ₁	H	H ₁	A	A ₁	A ₂	A ₃	P	L	t	H ₁	U-PVC, C-PVC		PP	H ₁	L	H ₁
L	t	H ₁	L	H ₁	L	t	H ₁	L	t										H ₁	L	H ₁						
15	48	159.5	29	190	55	42	49	1/8	143	12	94	108	77	108	77	102	74	130	12	88	102	72	99	71	102	74	
20	60	161.5	35	190	55	42	49	1/8	172	14	115	128	93	126	92	120	89	150	14	104	120	85	114	83	120	89	
25	70	168.5	39	190	55	42	49	1/8	187	14	133	145	112	141	110	131	105	160	14	120	131	104	123	100	131	105	
32	100	224	55	240	105	53	50	1/4	212	16	165	174	154	-	-	163	141	212	16	165	173	147	148	131	163	141	
40	100	224	55	240	105	53	50	1/4	212	16	165	189	154	171	145	163	141	200	16	159	163	142	148	131	163	141	
50	126	235.5	66	240	105	53	50	1/4	234	16	187	220	180	192	166	197	168	230	16	185	197	170	176	154	197	168	
65	152	277	85	288	125	67	52	1/4	304	18	256	316	261	264	235	264	235	304	18	256	282	245	256	227	264	235	
80	152	277	85	288	125	67	52	1/4	304	18	256	316	261	258	232	264	235	310	21	259	282	245	251	224	264	235	
100	210	348	110	341	146	82.5	59	1/4	372	18	305	418	328	340	289	360	299	350	18	305	349	305	310	279	338	299	

■ ANSI (Unit: inch)

ANSI (Unit: inch)										ANSI								
inch	mm	D ₁	H	H ₁	A	A ₁	A ₂	A ₃	P	FLANGED ANSI CLASS150			SOCKET				THREADED	
										L	t	H ₁	U-PVC, C-PVC		PP, PVDF		L	H ₁
1/2	15	1.89	6.28	1.14	7.48	2.17	1.65	1.93	1/8	5.63	0.47	3.70	4.45	3.08	4.45	3.09	4.02	2.89
3/4	20	2.36	6.36	1.38	7.48	2.17	1.65	1.93	1/8	6.77	0.55	4.50	5.08	3.56	5.08	3.61	4.72	3.48
1	25	2.76	6.63	1.54	7.48	2.17	1.65	1.93	1/8	7.36	0.55	5.24	5.75	4.32	5.75	4.37	5.16	4.13
1 1/4	32	3.94	8.82	2.17	9.45	4.13	2.09	1.97	1/4	8.35	0.63	6.50	6.85	5.51	7.04	5.75	6.42	5.53
1 1/2	40	3.94	8.82	2.17	9.45	4.13	2.09	1.97	1/4	8.35	0.63	6.50	7.24	5.71	7.24	5.85	6.42	5.53
2	50	4.96	9.27	2.60	9.45	4.13	2.09	1.97	1/4	9.21	0.63	7.34	8.23	6.66	8.23	6.76	7.76	6.61
2 1/2	65	5.98	10.91	3.35	11.34	4.92	2.64	2.05	1/4	11.97	0.71	10.06	11.21	9.65	11.21	9.65	10.39	9.25
3	80	5.98	10.91	3.35	11.34	4.92	2.64	2.05	1/4	11.97	0.71	10.06	11.10	9.59	11.10	11.10	10.39	9.25
4	100	8.27	13.70	4.33	13.43	5.75	3.25	2.32	1/4	14.66	0.71	12.01	13.90	11.58	14.37	14.37	14.17	11.77

AUTOMATIC

ELECTRIC

TYPE T



Single-Phase 100V
Single-Phase 200V

3 WAY BALL VALVE TYPE 23



TYPE—A23T

CONNECTION / FLANGED, SOCKET, THREADED—JIS, DIN, ANSI

FLANGED FOR 15 - 50 mm

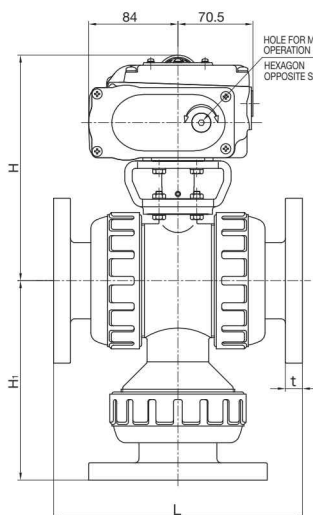



FOR 65 - 80 mm



ACTUATOR SELECTION CHART

SIZE	ACTUATOR TYPE
15mm (1/2inch)	T-00
20mm (3/4inch)	
25mm (1inch)	
32mm (1 1/4inch)	
40mm (1 1/2inch)	
50mm (2inch)	T-0
65mm (2 1/2inch)	
80mm (3inch)	
100mm (4inch)	

For detailed specifications, see P.139



JIS, DIN (Unit: mm)

JIS, DIN (Unit: mm)			JIS										DIN									
mm	D ₁	H	FLANGED JIS10K			SOCKET				THREADED			FLANGED DIN PN10			SOCKET				THREADED		
			L	t	H ₁	U-PVC, C-PVC		PP		L	H ₁	L	H ₁	L	t	H ₁	U-PVC, C-PVC		PP		L	H ₁
						L	H ₁	L	H ₁								L	H ₁	L	H ₁		
15	48	169.5	143	12	94	108	77	108	77	102	74	130	12	88	102	72	99	71	102	74		
20	60	176	172	14	115	128	93	126	92	120	89	150	14	104	120	85	114	83	120	89		
25	70	183	187	14	133	145	112	141	110	131	105	160	14	120	131	104	123	100	131	105		
32	100	200.5	212	16	165	174	154	-	-	163	141	212	16	165	173	147	148	131	163	141		
40	100	200.5	212	16	165	189	154	171	145	163	141	200	16	159	163	142	148	131	163	141		
50	126	212	234	16	187	220	180	192	166	197	168	230	16	185	197	170	176	154	197	168		
65	152	289	304	18	256	316	261	264	235	264	235	304	18	256	282	245	256	227	264	235		
80	152	289	304	18	256	316	261	258	232	264	235	310	21	259	282	245	251	224	264	235		
100	210	327	372	18	305	418	328	340	289	360	299	350	18	305	349	305	310	279	338	299		

ANSI (Unit: inch)

ANSI (Unit: inch)				ANSI									
inch	mm	D ₁	H	FLANGED ANSI CLASS150			SOCKET				THREADED		
				L	t	H ₁	U-PVC, C-PVC		PP, PVDF		L	H ₁	
							L	H ₁	L	H ₁			
1/2	15	1.89	6.67	5.63	0.47	3.70	4.45	3.08	4.45	3.09	4.02	2.89	
3/4	20	2.36	6.93	6.77	0.55	4.50	5.08	3.56	5.08	3.61	4.72	3.48	
1	25	2.76	7.20	7.36	0.55	5.24	5.75	4.32	5.75	4.37	5.16	4.13	
1 1/4	32	3.94	7.89	8.35	0.63	6.50	6.85	5.51	7.04	5.75	6.42	5.53	
1 1/2	40	3.94	7.89	8.35	0.63	6.50	7.24	5.71	7.24	5.85	6.42	5.53	
2	50	4.96	8.35	9.21	0.63	7.34	8.23	6.66	8.23	6.76	7.76	6.61	
2 1/2	65	5.98	11.38	11.97	0.71	10.06	11.21	9.65	11.21	9.65	10.39	9.25	
3	80	5.98	11.38	11.97	0.71	10.06	11.10	9.59	11.10	11.10	10.39	9.25	
4	100	8.27	12.87	14.66	0.71	12.01	13.90	11.58	14.37	14.37	14.17	11.77	

3 WAY BALL VALVE TYPE 23 H

- HORIZONTAL 3 WAY BALL VALVE
- T-SHAPED FLOW PATH ALLOWS FOR EASY SWITCHING OF FLOW CHANNEL.
- END CONNECTOR AND UNION NUT ARE COMPATIBLE WITH 3 WAY BALL VALVE TYPE 23.

BASIC SPECIFICATIONS

VALVE TYPE

3 WAY BALL VALVE TYPE 23H

SIZE

25 mm—40 mm (1 inch—1 1/2 inch)

BODY MATERIAL

PP

SEAL MATERIAL / SEAT

PTFE

O-RING

EPDM FKM etc.

CONNECTION / FLANGED

JIS10K, DIN PN10, ANSI CLASS150

SOCKET

JIS, DIN, ANSI

THREADED

Rc, Rp, NPT

	FLUID TEMPERATURE	MAXIMUM WORKING PRESSURE (NORMAL TEMPERATURE) (MPa)(kgf/cm ²)	CONNECTION METHOD		
			FLANGED	SOCKET	THREADED
PP	-20℃ ~ 80℃	1.0 {10.2}	○	○	○

NOTE


The maximum working pressure is the value including the water hammer pressure. Be careful that the maximum working pressure is not exceeded during use. Cannot completely stop the flow in three directions.
* Concerning the allowable pressure for each temperature and material, see the technical documents at the end of this catalog.

MANUAL




PARTS LIST

MANUAL

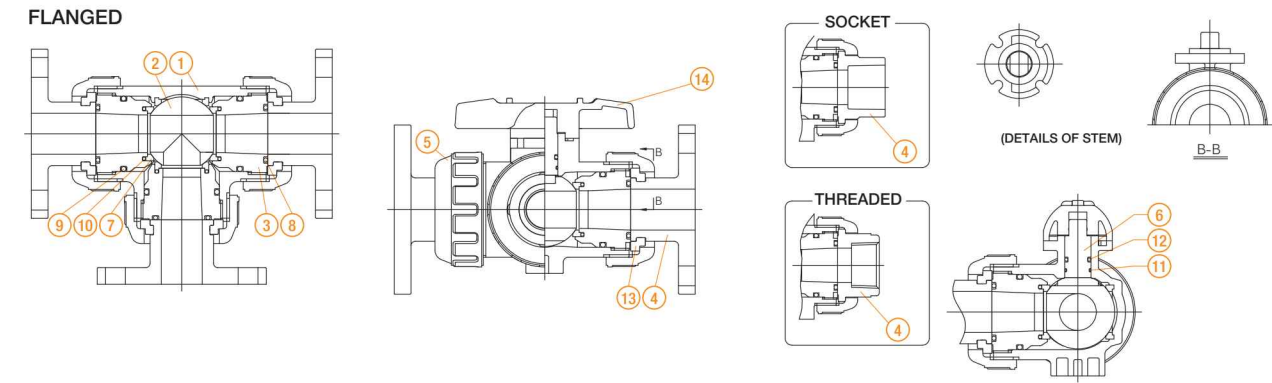

PART NO. / NAME	QTY	MATERIAL	PART NO. / NAME	QTY	MATERIAL	PART NO. / NAME	QTY	MATERIAL
1 BODY	1	PP	7 SEAT	4	PTFE	13 STOP RING	3	PVDF (Used for flanged type.)
2 BALL	1	PP	8 O-RING (A)	3	EPDM, FKM, etc.	14 HANDLE	1	ABS
3 UNION	3	PP	9 O-RING (B)	3	EPDM, FKM, etc.			
4 END CONNECTOR	3	PP	10 O-RING (C)	3	EPDM, FKM, etc.			
5 UNION NUT	3	PPG	11 O-RING (D)	1	EPDM, FKM, etc.			
6 STEM	1	PP	12 O-RING (E)	1	EPDM, FKM, etc.			

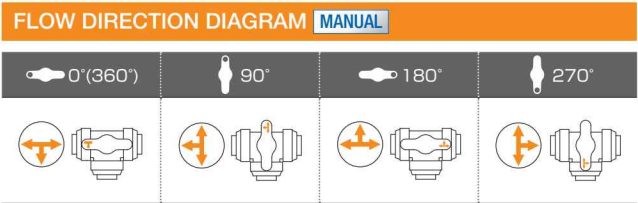

PRODUCT MODEL
CODE LIST

MANUAL

ACTUATION	TYPE	OPERATING SYSTEM	BODY MATERIAL	SEAL MATERIAL	CONNECTION	STANDARD	SIZE
V	3H	LV	P	*	*	*	***
V	3H	LV	PP	E EPDM V FKM	S SOCKET N THREADED P SPIGOT F FLANGED	J JIS D DIN A ANSI 1 JIS10K	025 25mm 032 32mm 040 40mm

NOTE (1) The available ball shape is T port only. (2) The socket and spigot types are weld type.
(3) Not compatible with 32-mm spigot type and JIS socket type. (4) Parts compliant with connection standards other than JIS (such as ANSI and DIN) are also available.






MANUAL

3 WAY BALL VALVE TYPE 23 H

TYPE—V3HLV

CONNECTION / FLANGED, SOCKET, THREADED—JIS, DIN, ANSI SPIGOT—DIN

FLANGED

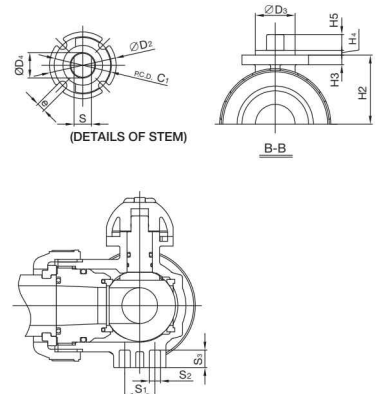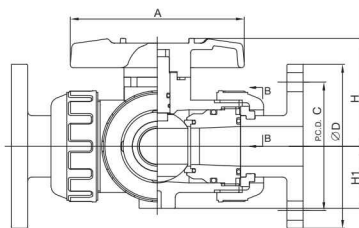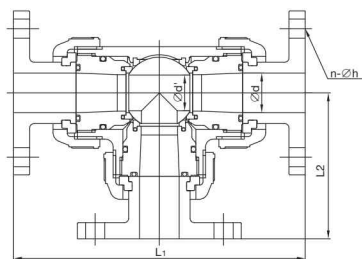

JIS, DIN (Unit: mm)

JIS, DIN (Unit: mm)																				JIS															
mm	d	d'	D ₁	D ₂	D ₃	D ₄	C ₁	H	H ₁	H ₂	H ₃	H ₄	H ₅	A	S	S ₁	S ₂	S ₃	e	FLANGED				SOCKET				THREADED							
																				JIS10K				t	L ₁	L ₂	d ₁	d _{1'}	L ₁	L ₂	d ₂	ℓ	L ₁	L ₂	
																				D	C	n	h												
25	25	22	70	42	25	15	36	68	39	44	6	3	10	110	11	19	7.3	11	5.5	125	90	4	19	14	216	108	33	32	25	170	85	Rc1	20	159	80
32	40	34	100	57	35	23	50	89	55	61	10	3	12	131	18	30	9	15	6.5	135	100	4	19	16	260	130	-	-	-	-	Rc1 1/4	22	208	104	
40	40	34	100	57	35	23	50	89	55	61	10	3	12	131	18	30	9	15	6.5	140	100	4	19	16	260	130	47	46	28	219	109.5	Rc1 1/2	25	208	104

mm	DIN																				
	FLANGED				SOCKET								THREADED				SPIGOT				
	DIN PN10				t	L1	L2	d1	d1'	ℓ	L1	L2	d2	ℓ	L1	L2	d3	ℓ	t	L1	L2
	D	C	n	h																	
25	115	85	4	14	14	189	94.5	31.5	31.3	18	152	76	Rp 1	20	159	79.5	32	22.5	3.0	183	91.5
32	140	100	4	16	16	260	130	39.45	39.2	20.5	197	98.5	Rp 1 1/4	22	208	104	-	-	-	-	-
40	150	110	4	16	16	248	124	49.45	49.2	23.5	197	98.5	Rp 1 1/2	25	208	104	50	32	4.6	242	121

ANSI (Unit: inch)

inch	mm	d	d'	D1	D2	D3	D4	C1	H	H1	H2	H3	H4	H5	A	S	S1	S2	S3	e
1	25	0.98	0.87	2.76	1.65	0.98	0.59	1.42	2.68	1.54	1.71	0.24	0.12	0.39	4.33	0.43	0.75	0.29	0.43	0.22
1 1/4	32	1.57	1.34	3.94	2.24	1.38	0.91	1.97	3.50	2.17	2.40	0.39	0.12	0.47	5.16	0.71	1.18	0.35	0.59	0.26
1 1/2	40	1.57	1.34	3.94	2.24	1.38	0.91	1.97	3.50	2.17	2.40	0.39	0.12	0.47	5.16	0.71	1.18	0.35	0.59	0.26

inch	mm	ANSI															
		FLANGED							SOCKET				THREADED				
		ANSI CLASS150															
D	C	n	h	t	L ₁	L ₂	d ₁	ℓ	L ₁	L ₂	d ₂	ℓ	L ₁	L ₂			
1	25	4.25	3.13	4	0.62	0.55	8.50	4.25	1.30	1.13	6.77	3.39	1-11 1/2NPT	0.79	6.26	3.13	
1 1/4	32	4.62	3.50	4	0.62	0.63	10.24	5.12	1.65	1.25	8.74	4.37	1 1/4-11 1/2NPT	0.87	8.19	4.09	
1 1/2	40	5.00	3.88	4	0.62	0.63	10.24	5.12	1.89	1.37	8.94	4.47	1 1/2-11 1/2NPT	0.98	8.19	4.09	

LAB COCK

- LIGHT-WEIGHT AND COMPACT PLASTIC VALVE WITH EXCELLENT CORROSION RESISTANCE, FLOW CHARACTERISTICS, DURABILITY AND FUNCTIONALITY
- WIDE SELECTION FROM A PRODUCT LINE OF 16 TYPES
- OCTAGON BODY ALLOWING FOR EASY PIPING WITH SPANNER
- FLOW CONTROL IS AVAILABLE.

BASIC SPECIFICATIONS

VALVE TYPE

LAB COCK

BODY MATERIAL

U-PVC

SEAL MATERIAL / SEAT

PTFE EPDM etc.

O-RING

EPDM FKM etc.


HIGH PURITY SERIES

LUBRICANT FREE

	FLUID TEMPERATURE	MAXIMUM WORKING PRESSURE (NORMAL TEMPERATURE) MPa(kg/cm²)	CONNECTION METHOD
U-PVC	0°C ~ 50°C	1.0 {10.2}	Hose type, Male thread type, Female thread type (Any combination is available.)

NOTE


(1) Degreased type is also available by made-to-order. (2) The maximum working pressure is the value including the water hammer pressure. Be careful that the maximum working pressure is not exceeded during use.
* Concerning the allowable pressure for each temperature and material, see the technical documents at the end of this catalog.

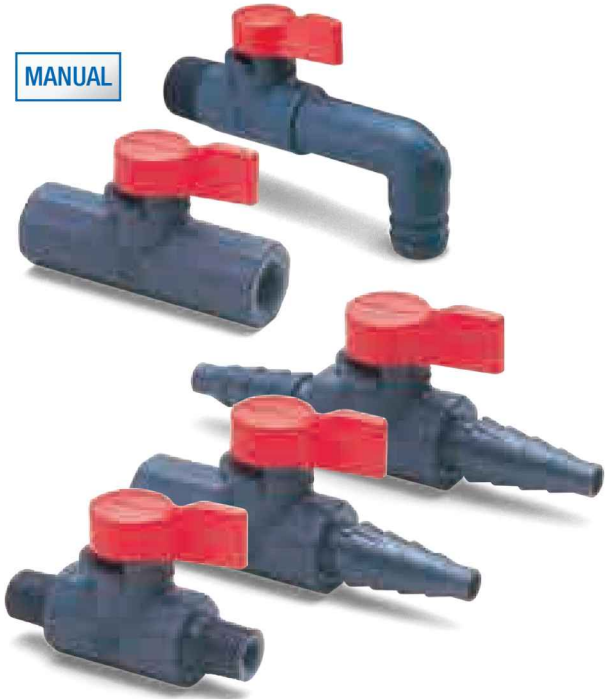

PARTS LIST

MANUAL


1. FEMALE THREAD X FEMALE THREAD

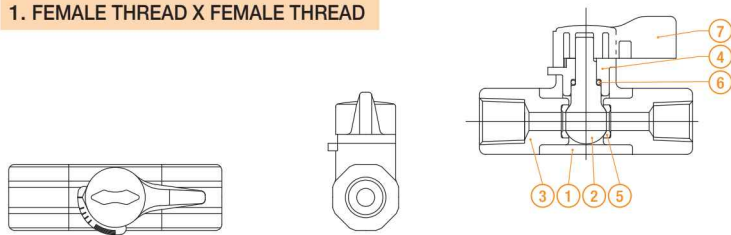

PART NO. / NAME	QTY	MATERIAL
1 BODY	1	U-PVC
2 BALL STEM	1	U-PVC
3 END CONNECTOR	2	U-PVC
4 STEM HOLDER	1	U-PVC
5 SEAT*	2	EPDM, PTFE, etc.
6 O-RING	1	EPDM, etc.
7 HANDLE	1	ABS

* For degreased type, PTFE only.

7. MALE THREAD X ELBOW 16 mm LUB. FREE

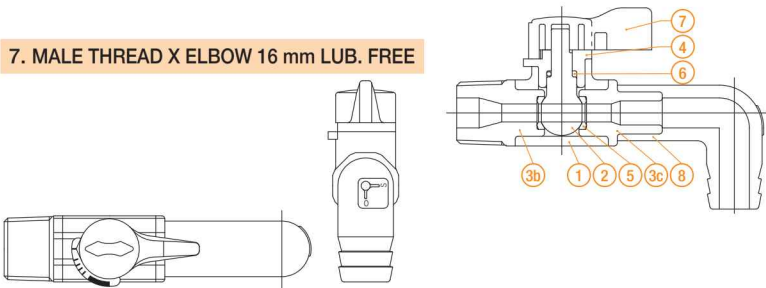

PART NO. / NAME	QTY	MATERIAL
1 BODY	1	U-PVC
2 BALL STEM	1	U-PVC
3b END CONNECTOR	1	U-PVC
3c END CONNECTOR	1	U-PVC
4 STEM HOLDER	1	U-PVC
5 SEAT	2	PTFE
6 O-RING	1	EPDM, etc.
7 HANDLE	1	ABS
8 ELBOW	1	U-PVC

* Standard products are degreased.

PRODUCT MODEL CODE LIST MANUAL	ACTUATION	TYPE	OPERATING SYSTEM	BODY MATERIAL	SEAL MATERIAL	STANDARD	CONNECTION	HIGH PURITY SERIES
	V	LC	LV	U	*	*	****	1
	...	...	...	...	...	...	...	...
	V MANUAL VALVE	LC LAB COCK	LV LEVER TYPE	U U-PVC	E EPDM V FKM 1 PTFE/EPDM	J JIS D DIN A ANSI	SEE CONNECTION P.66.	1 LUBRICANT FREE


LAB COCK

TYPE—VLCLV

CONNECTION / MALE THREAD, FEMALE THREAD, HOSE—JIS, DIN, ANSI


1. Female thread x Female thread

- 1/4 female thread x 1/4 female thread
- 3/8 female thread x 1/4 female thread
- 3/8 female thread x 3/8 female thread

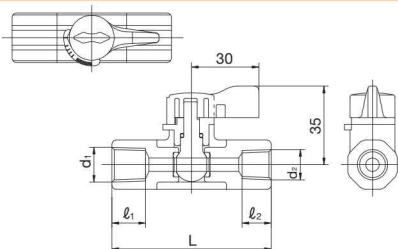


2. Hose x Hose

- Hose x Hose

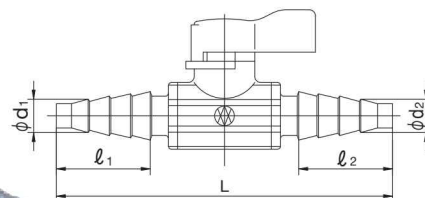


3. Female thread x Hose

- 1/4 female thread x Hose
- 3/8 female thread x Hose

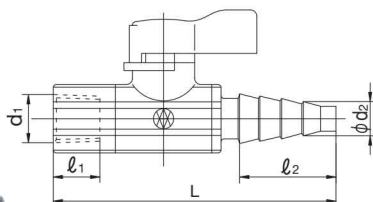


4. Male thread x Hose

- 1/4 male thread x Hose
- 1/2 male thread x Hose




5. Male thread x Male thread

- 1/4 male thread x 1/4 male thread
- 1/2 male thread x 1/4 male thread
- 1/2 male thread x 1/2 male thread



6. Male thread x Female thread


- 1/4 male thread x 1/4 female thread
- 1/4 male thread x 3/8 female thread
- 1/2 male thread x 1/4 female thread
- 1/2 male thread x 3/8 female thread



7. Male thread x Elbow 16 mm degreased


- 1/2 male thread x Elbow 16 mm

* Standard products are LUB. FREE.




CONNECTION CONNECTOR


HOSE TYPE
CONNECTION
CONNECTOR



THREAD TYPE
CONNECTION
CONNECTOR



FEMALE
THREAD TYPE
CONNECTION
CONNECTOR



	CONNECTION	JIS					DIN					ANSI				
		d1	d2	l1	l2	L	d1	d2	l1	l2	L	d1	d2	l1	l2	L
1. Female thread x Female thread	N4N4	Rc 1/4	Rc 1/4	15	15	71	Rp 1/4	Rp 1/4	15	15	71	1/4-18NPT	1/4-18NPT	0.51	0.51	2.80
	N8N4	Rc 3/8	Rc 1/4	15	15	71	Rp 3/8	Rp 1/4	15	15	71	3/8-18NPT	1/4-18NPT	0.59	0.51	2.80
	N8N8	Rc 3/8	Rc 3/8	15	15	71	Rp 3/8	Rp 3/8	15	15	71	3/8-18NPT	3/8-18NPT	0.59	0.59	2.80
2. Hose x Hose	H0H0	10	10	30.5	30.5	111	10	10	30.5	30.5	111	0.39	0.39	1.20	1.20	4.37
	N4H0	Rc 1/4	10	15	30.5	91	Rp 1/4	10	15	30.5	91	1/4-18NPT	0.39	0.51	1.20	3.58
3. Female thread x Hose	N8H0	Rc 3/8	10	15	30.5	91	Rp 3/8	10	15	30.5	91	3/8-18NPT	0.39	0.59	1.20	3.58
	O4H0	R 1/4	10	13	30.5	88.5	R 1/4	10	13	30.5	88.5	1/4-18NPT	0.39	0.51	1.20	3.48
4. Male thread x Hose	O2H0	R 1/2	10	15	30.5	91	R 1/2	10	15	30.5	91	1/2-14NPT	0.39	0.59	1.20	3.58
	O4O4	R 1/4	R 1/4	13	13	66	R 1/4	R 1/4	13	13	66	1/4-18NPT	1/4-18NPT	0.51	0.51	2.60
5. Male thread x Male thread	O2O4	R 1/2	R 1/4	15	13	68.5	R 1/2	R 1/4	15	13	68.5	1/2-14NPT	1/4-18NPT	0.59	0.51	2.70
	O2O2	R 1/2	R 1/2	15	15	71	R 1/2	R 1/2	15	15	71	1/2-14NPT	1/2-14NPT	0.59	0.59	2.80
	O4N4	R 1/4	Rc 1/4	13	15	68.5	R 1/4	Rp 1/4	13	15	68.5	1/4-18NPT	1/4-18NPT	0.51	0.51	2.70
6. Male thread x Female thread	O4N8	R 1/4	Rc 3/8	13	15	68.5	R 1/4	Rp 3/8	13	15	68.5	1/4-18NPT	3/8-18NPT	0.51	0.59	2.70
	O2N4	R 1/2	Rc 1/4	15	15	71	R 1/2	Rp 1/4	15	15	71	1/2-14NPT	1/4-18NPT	0.59	0.51	2.80
	O2N8	R 1/2	Rc 3/8	15	15	71	R 1/2	Rp 3/8	15	15	71	1/2-14NPT	3/8-18NPT	0.59	0.59	2.80
7. Male thread x Elbow	O2LO1	R 1/2	16	15	32	93	-	-	-	-	-	1/2-14NPT	0.63	0.59	1.26	3.66

COMPACT BALL VALVE TYPE 27

- WITH A SMALL NUMBER OF COMPONENTS AND LIGHT WEIGHT, COMPACT DESIGN, SUITABLE FOR INSTALLATION IN A NARROW SPACE AND IDEAL FOR FACILITY PIPING IN PLANTS.
- THE SPHERICAL VALVE ELEMENT ALLOWS FOR A STRAIGHT FLOW PATH AND EXTREMELY SMALL FLUID RESISTANCE. (EXCELLENT WATER CHARACTERISTICS)
- NO RISK OF DIFFICULT HANDLE OPERATION DUE TO THERMAL EXPANSION OR CONTRACTION.
- USING PTFE, THE SEAT IS HIGHLY RESISTANT TO CORROSION, CHEMICALS AND ABRASION.

BASIC SPECIFICATIONS

VALVE TYPE	COMPACT BALL VALVE	
SIZE	13 mm—50 mm (3/8 inch—2 inch)	
BODY MATERIAL	U-PVC	C-PVC
SEAL MATERIAL / SEAT	PTFE	
O-RING	EPDM etc.	
CONNECTION / SOCKET	JIS, DIN, ANSI	
THREADED	Rc, Rp, NPT	

	FLUID TEMPERATURE	MAXIMUM WORKING PRESSURE (NORMAL TEMPERATURE) (MPa)(kgf/cm²)	CONNECTION METHOD	
			SOCKET	THREADED
U-PVC	0°C ~ 50°C	1.0 {10.2}	○	○
C-PVC	0°C ~ 90°C	1.0 {10.2}	○	○

NOTE (1) The maximum working pressure is the value including the water hammer pressure. Be careful that the maximum working pressure is not exceeded during use. (2) The ball-type valves have dead spaces for structural reasons. Note that volatile liquids, such as hydrogen peroxide (H₂O₂) and sodium hypochlorite (NaClO), vaporize in those dead spaces, which may cause abnormal pressure increase in the valve. (When the internal pressure abnormally increases due to vaporization, the gas will be compressive fluid. If the valve breaks in this state, it will be very dangerous, causing explosion and scattering of fragments.)

* Concerning the allowable pressure for each temperature and material, see the technical documents at the end of this catalog.


MANUAL




PARTS LIST

MANUAL

SOCKET

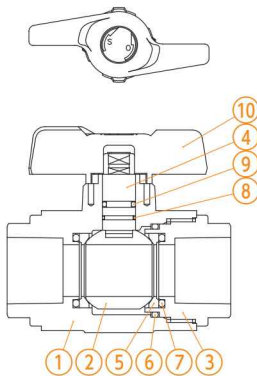

THREADED

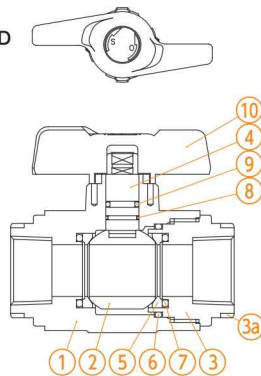

PART NO. / NAME	QTY	MATERIAL
① BODY	1	U-PVC, C-PVC
② BALL	1	U-PVC, C-PVC
③ END CONNECTOR	1	U-PVC, C-PVC
③a RING	2	SUS304 (Used for C-PVC 13 - 25 mm threaded type.)
④ STEM	1	U-PVC, C-PVC
⑤ SEAT	2	PTFE

PART NO. / NAME	QTY	MATERIAL
⑥ O-RING (B)	1	EPDM,etc.
⑦ O-RING (C)	2	EPDM,etc.
⑧ O-RING (D)	1	EPDM,etc.
⑨ O-RING (E)	1	EPDM,etc.
⑩ HANDLE	1	ABS

PRODUCT MODEL
CODE LIST

MANUAL

ACTUATION	TYPE	OPERATING SYSTEM	BODY MATERIAL	SEAL MATERIAL	CONNECTION	STANDARD	SIZE	HIGH PURITY SERIES
V	7B	LV	*	*	*	*	***	1
V MANUAL VALVE	7B TYPE 27	LV LEVER TYPE	U U-PVC C C-PVC	E EPDM V FKM	S SOCKET N THREADED	J JIS D DIN A ANSI	013 13mm 050 50mm	1 LUBRICANT FREE


MANUAL

COMPACT BALL VALVE TYPE 27


TYPE—V7BLV

CONNECTION / SOCKET, THREADED—JIS, DIN, ANSI

SOCKET

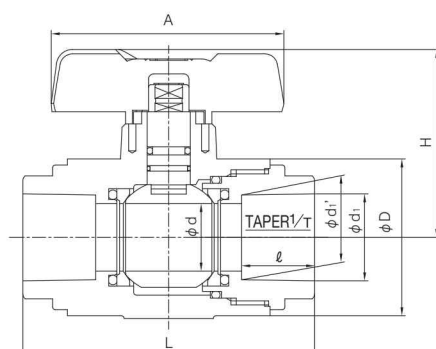

THREADED

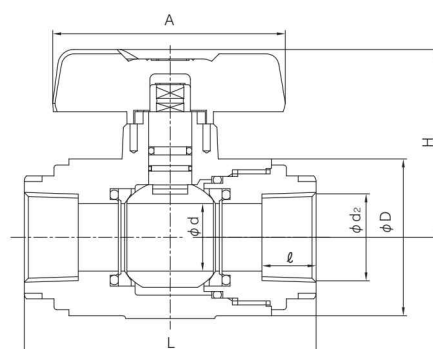

■ JIS, DIN (Unit: mm)

JIS, DIN (Unit: mm)						JIS							DIN						
mm	inch	d	A	D	H	SOCKET				THREADED			SOCKET			THREADED			
						d ₁	ℓ	1/T	L	d ₂	ℓ	L	d ₁	ℓ	L	d ₂	ℓ	L	
13	3/8	15	75	40	52.5	18.20	17	1/30	69	-	-	-	16	14	69	Rp3/8	15	69	
15	1/2	15	75	40	52.5	22.11	20	1/34	79	Rc1/2	15	69	20	16	79	Rp1/2	15	79	
20	3/4	20	87	49	62.5	26.13	24	1/34	94	Rc3/4	17	94	25	19	94	Rp3/4	17	94	
25	1	25	87	58	69.5	32.16	27	1/34	108	Rc1	20	108	32	22	108	Rp1	20	108	
32	1 1/4	31	105	68	81.5	38.19	30	1/34	121	Rc1 1/4	22	121	40	26	121	Rp1 1/4	22	121	
40	1 1/2	40	135	82.5	96.0	48.21	37	1/37	146	Rc1 1/2	25	146	50	31	146	Rp1 1/2	25	146	
50	2	51	135	104	107.5	60.25	42	1/37	175	Rc2	28	175	63	38	175	Rp2	28	175	

■ ANSI (Unit: inch)

ANSI (Unit: inch)						ANSI							
inch	mm	d	A	D	H	SOCKET				THREADED			
						ASTM SCH40				d ₂	ℓ	L	
						d ₁	d ₁ '	ℓ	L				
3/8	13	0.59	2.95	1.57	2.07	0.687	0.671	0.59	2.72	3/8-18NPT	0.59	2.72	
1/2	15	0.59	2.95	1.57	2.07	0.848	0.836	0.69	3.11	1/2-14NPT	0.59	3.11	
3/4	20	0.79	3.43	1.93	2.46	1.058	1.046	0.72	3.70	3/4-14NPT	0.67	3.70	
1	25	0.98	3.43	2.28	2.74	1.325	1.310	0.87	4.25	1-11 1/2NPT	0.79	4.25	
1 1/4	32	1.22	4.13	2.68	3.21	1.670	1.655	0.94	4.76	1 1/4-11 1/2NPT	0.87	4.76	
1 1/2	40	1.57	5.31	3.25	3.78	1.912	1.894	1.09	5.75	1 1/2-11 1/2NPT	0.98	5.75	
2	50	2.01	5.31	4.09	4.23	2.387	2.369	1.16	6.86	2-11 1/2NPT	1.10	6.86	

ENSAT (METAL INSERT) MOUNTING PROCEDURE

DIAPHRAGM VALVE TYPE 14 15mm - 100mm

TRUE UNION DIAPHRAGM VALVE TYPE 14 15mm - 50mm

BALL VALVE TYPE 21, 21α 15mm - 50mm

BALL VALVE TYPE 21 65mm - 100mm



At the bottom of the valve body, a "holed bottom stand" is provided which can be easily secured to a rack or panel only by inserting an Ensats.



★ Install the metal insert (Ensats) in the procedure below.

<When using the special tool>

Attach the Ensats at the end of special tool with the splitting groove facing downward.

While ensuring that the center is aligned with the prepared hole from the front, back, right and left, screw the Ensats in to the pre-determined depth.

After the Ensats is screwed in completely, hold the nut with a spanner while turning the upper portion of the tool in the reverse direction. The tool will be freely movable and come out.

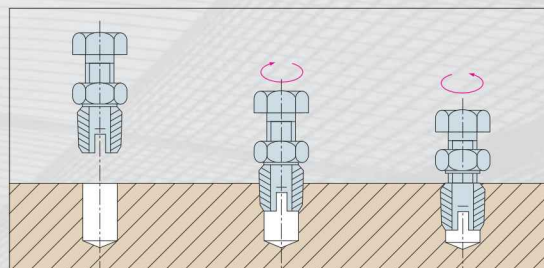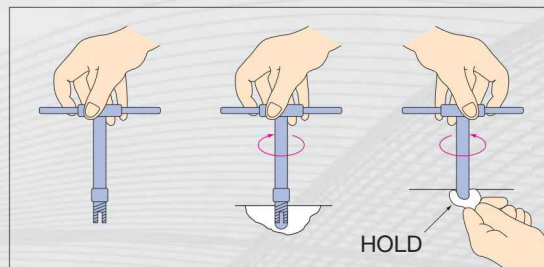

<When using a bolt and nut>

Screw the Ensats in in a double nut fashion. After the Ensats is screwed in, hold the bolt and loosen the nut. The bolt will be freely movable and can be removed.

When the Ensats is manually screwed in, the center alignment between the Ensats and the prepared hole is particularly important. Check that the Ensats is inserted perpendicular to the prepared hole while screwing it in. If it is tilted, do not turn the tool backward, but just put the Ensats in its correct position. Note that, when nearly half of the Ensats is once inserted, its position can no longer be corrected.

NOTE For details of how to handle the Ensats mounting special tool, see the instruction manual provided by the Ensats manufacturer. (K.K.V.CORPORATION)

APPLICABLE ENSAT (REFERENCE)

SPEC.	SCREW SIZE	LENGTH (mm)
①	M5	10
②	M6	14
③	M8	15
④	M12	22

SIZE (mm)	15	20	25
14DV	①	①	①
21BV	①	①	①

SIZE (mm)	32	40	50
14DV	①	②	②
21BV	②	②	②

SIZE (mm)	65	80	100
14DV	③	④	④

BOTTOM STAND MOUNTING PROCEDURE

